



Your iWL258

installation and user guide.



We're excited to have you on board.

Our easy guide will help you get up and running in no time.


We'll cover:

- 1. Plugging in the power supply.
- 2. Connecting your terminal to the base.
- 3. Connecting your terminal to WiFi automatically.
- 4. Connecting your terminal to WiFi manually.

1.

Plugging in the power supply.

Take the power cable and plug it into the circular port on your base unit as shown.

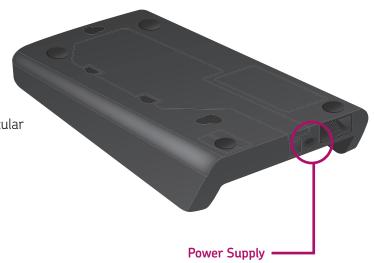

2.

Connecting your terminal to the base.

Take the terminal and place it onto the base unit. It should click into place.

You'll know it's connected as the terminal will start to automatically power up.

Once it's plugged in, you'll be able to connect the base to WiFi automatically or manually.

- To connect the WiFi automatically, go to page 4.
- To connect the WiFi manually, go to page 6.

3.

Connecting your terminal to WiFi automatically.

Once the terminal has powered up, it'll show the first screen shown below. Follow the steps to install your terminal.

Terminal Installation
Select WiFi Network

and press ENTER

This screen will show first. Press 'Enter' to continue.

2 Profiles

- 1 New Profile
- 2 Active Profile
- 3 Modify Profile

Select '1 - New Profile' and press 'Enter'.

3 Connection Method

- 1 Automatic Scan
- 2 Manual Connection

Select 'Automatic Scan' and press 'Enter'.

4 EE-BrightBox..
TALKTALK-12PZ34
SKY12PZ34

The terminal will scan and show nearby networks. Select your network and press 'Enter'.

5 Security

- 1 Personal Security
- 2 Enterprise Security

and then press $\ensuremath{\mathsf{ENTER}}$

It'll ask for your networks security type. Select 'Personal Security' and press 'Enter'.

6 WiFi Password Node-adapt-nor

Type in your WiFi password and press 'Enter'.

Connecting your terminal to WiFi automatically continued...



This screen will then show. Press 'Cancel' three times to reboot the terminal.

Terminal Installation
Key In Merchant No.
(6 digit number)

and then press ENTER

Type in your merchant number and press 'Enter'. You can find it in your welcome email.

Once completed, the terminal screen will display a **READY** prompt and show your merchant number.

To make sure the terminal is fully installed, we recommend doing a test transaction of 1p. You can find out how to do this in your Ingenico iWL258 Quick-Start Guide.

If the WiFi network uses enterprise security, please check the **Ingenico iWL258 Quick-Start Guide** to see how to do this.



Connecting your terminal to WiFi manually.

Once the terminal has powered up, it'll show the first screen shown below. Follow the steps to install your terminal.

Terminal Installation
Select WiFi Network
and press ENTER

This screen will show first. Press **'Enter'** to continue.

Profiles

1 - New Profile

2 - Active Profile

3 - Modify Profile

Select **'1 – New Profile**' and press **'Enter**'.

Connection Method
1 - Automatic Scan
2 - Manual Connection

Select 'Manual Connection' and press 'Enter'.

4 Hidden Access Point
1 - No
2 - Yes
and then press ENTER

You'll be asked if the WiFi is hidden on devices. Select the option that applies, and press 'Enter'.


ESSID Entry
BRIGHTBOX-PZ1234
and then press ENTER

You'll be asked to provide your WiFi network name. Type in the network name and press 'Enter'.

Security
1 - Personal Security
2 - Enterprise Security
and then press ENTER

It'll ask for your network's security type. Select 'Personal Security' and press 'Enter'.

Connecting your terminal to WiFi manually continued...



Type in your WiFi password and press 'Enter'.

8 New Profile OK

This screen will then show. Press 'Cancel' three times to reboot the terminal.

Terminal Installation
Key In Merchant No.
(6 digit number)

and then press ENTER

Type in your merchant number and press 'Enter'. You can find it in your welcome email.

Once completed, the terminal screen will display a **READY** prompt and show your merchant number.

To make sure the terminal is fully installed, we recommend doing a test transaction of 1p. You can find out how to do this in your **Ingenico iWL258 Quick-Start Guide**.

After rebooting, the terminal may go back to the WiFi connection screen. If this happens, press cancel, and the installation screen should appear. Please check for the WiFi signal bars.

If the WiFi network uses enterprise security, please check the **Ingenico iWL258 Quick-Start Guide** to see how to do this.

We're here to help make things easy.

For any installation questions, give our team a call on:

01606 566 600

Monday-Friday, 9am-5pm

takepayments.com



