

Hosted Payment Form

Credit & Debit Card Processing

v 2.5.01

Table of Contents

Introduction	5
Intended Audience.....	5
Simplifying the Integration Process	5
Important Notes.....	6
Gateway URLs	6
Hashing Explained	6
Simple hashing example	6
Notation Explained.....	8
Data Types.....	8
Result Delivery Methods.....	9
POST.....	9
SERVER	9
SERVER_PULL	9
Required Input Variables	10
Incoming Hash Digest.....	14
Result Delivery Methods – Implementation.....	17
POST Result Delivery Method	17
Output Variables	18
Outgoing Hash Digest.....	21
SERVER Result Delivery Method	24
Request Variables Pushed To Merchants ServerResultURL.....	24
Request Hash Digest Pushed To Merchants ServerResultURL.....	26
Expected Response From Merchant’s ServerResultURL.....	28
SERVER Output Variables.....	29
SERVER Output Hash Digest.....	29
SERVER_PULL Result Delivery Method	30
SERVER_PULL Output Variables	30
SERVER_PULL Output Hash Digest.....	30
SERVER_PULL Request Variables	30
Transaction Result PULL Response	31
SERVER_PULL Transaction Result Variables.....	31
Appendix 1: Gateway Response StatusCodes.....	34
Appendix 2: Transaction Data Flow	35

All Result Delivery Methods.....	35
POST Result Delivery Method	36
POST Transaction Flow - Including 3D Secure Authentication	37
POST Transaction Flow - 3D Secure Card Not Enrolled.....	38
POST Transaction Flow - 3D Secure Disabled (MMS Settings).....	39
SERVER Result Delivery Method	40
SERVER Transaction Flow – Including 3D Secure Authentication.....	41
SERVER Transaction Flow – 3D Secure Card Not Enrolled	42
SERVER Transaction Flow – 3D Secure Disabled (MMS Settings)	43
SERVER_PULL Result Delivery Method	44
SERVER_PULL Transaction Flow – Including 3D Secure Authentication	45
SERVER_PULL Transaction Flow – 3D Secure Card Not Enrolled	46
SERVER_PULL Transaction Flow – 3D Secure Disabled (MMS Settings)	47
Appendix 3: Example HPF Messages.....	48
POST Result Delivery Method - Request.....	48
SERVER Result Delivery Method – Request	49
SERVER Result Delivery Method – Reply to Gateway Response.....	49
SERVER_PULL Result Delivery Method – Request	50
Hosted Payment Form – Response	51
Appendix 4: Transaction Result Status Codes.....	52
Appendix 5: Override Policy Codes & Explanations.....	52
OverrideAVSPolicy Codes.....	52
Character 1 Codes	52
Character 2 Codes	52
Character 3 Codes	53
Character 4 Codes	53
Examples	53
Questions	53
OverrideCV2Policy Codes.....	54
Character 1 Codes	54
Character 2 Codes	54
Examples	54
Questions	54
Appendix 6: Country (ISO 3166-1) Codes.....	55
Appendix 7: Currency (ISO 4217) Codes	61

Introduction

Intended Audience

This document is technical in nature and should be used by your company's developers to integrate your systems into the payment gateway. It assumes that the reader has knowledge and understanding of basic HTML concepts such as form post.

Simplifying the Integration Process

There are many complexities when dealing with card transactions. If you try and tackle them all at once the task of integrating will seem complicated. The best way to do the integration is to follow a simple step by step approach and break the process down into manageable sections, each adding functionality as you go along.

To assist you example code is available in the resource section in most of the common programming languages. Where possible please use these well documented examples as a starting point.

Adhering to good coding practices will also greatly simplify your task.



IMPORTANT: PLEASE READ CAREFULLY

Important Notes

Gateway URLs

In this document, payment gateway specific URLs have “paymentprocessor.net” as the domain (For example, <https://mms.paymentprocessor.net>). When using these URL’s in the integration, “paymentprocessor.net” must be replaced by with the name of the payment gateway provider.

The generalised full URL to use in your posts to the Hosted Payment Form is

<https://mms.paymentprocessor.net/Pages/PublicPages/PaymentForm.aspx>

Hashing Explained

When the Hosted Payment Form solution is implemented, the transaction data must be protected as it is being passed to the payment page via the customer’s browser. The data is protected by use of Hashing. Hashing is used to produce a unique "signature" for the data being passed (it is generated using not only the data being transmitted, but also secret data that is not transmitted, so it is impossible to recreate the hash digest with just the data that is passed via their browser). The hash signature is then re-calculated by our system on receipt of the transmitted data, and if it does not match the hash signature that was transmitted with the data, then the data has been tampered with, and the transaction will stop with an error message. The same process (in reverse) should be carried out by your site on receipt of the transaction results.

Examples of this type of tampering could be lowering the transaction price (say from £100.00 down to \$1.00), or making a failed transaction look like an authorised one. This is called a "man-in-the-middle" attack.

Simple hashing example

Here is an example of some transaction variables:

MerchantID: YourCo-1234567
Amount: 100.00
CurrencyCode: 826
OrderID: 12345

These variables would be concatenated (in a specific order) and combined with data known only to your system and ours (the account password and PreSharedKey) which is NOT transmitted with the transaction request. This produces the following string:

MerchantID=YourCo-1234567&Password=MyPassword&PreSharedKey=ASecretKey&Amount=10000&CurrencyCode=826&OrderID=12345

A simple hash method would output the following hash digest (or “Signature”), when this string is passed into a hashing (in this case SHA1) function (which is also transmitted with the transaction variables):

5c6b9c913b2301e9aa6ff488b06e09273cded2a5

If the amount was altered from £100.00 to £1.00:

MerchantID: YourCo-1234567

Amount: 1.00

CurrencyCode: 826

OrderID: 12345

When these variables are received by our system, they would be used to produce the following string:

MerchantID=YourCo-

1234567&Password=MyPassword&PreSharedKey=ASecretKey&Amount=100&CurrencyCode=826&OrderID=12345

Which when passed into the same hashing function would produce the following hash digest (or “Signature”):

4ba1164acbec732c18cd6e5f632adcdd4b440237

This demonstrates that changing any of these variables, even just a single character, results in a very different resulting hash digest, and makes the process of detecting variable tampering very easy.

Notation Explained

The communication between the merchant's system/customer's browser, to the gateway PaymentForm are POST via HTML form variables. The below table or similar format, is used throughout this document to help explain the requirements for passing/receiving variables to/from the gateway.

An example HTML form POST variable which would get to the gateway;

```
<input type="hidden" name="InputName" value="InputValue" />
```

Input Field Name	Data Type	Max Length	Mandatory or Always Present	Comments
InputName				

Input Field Name:

The value in this field is **case sensitive** and should be sent exactly as is stated here. Failure to do so will result in errors, specifically relating to missing variables or hash digest mismatches.

Data Type:

All variables will be converted to a string when the HTML is rendered anyway, but, this is to stipulate what the expected value should be readable as. For example, Boolean should only be sent as "TRUE" or "FALSE". Some scripting languages like PHP only state "1" or "0" for Boolean, which would be deemed invalid by the gateway so all values must be converted to the noted data type first.

Max Length:

This is the maximum length that the gateway will allow for the variable. If a "-" is noted, this means it is of variable length. If there is a numerical value in the field, any variables passed that are longer than this will result in an error.

Mandatory:

This informs the merchant if a variable is deemed to be mandatory by the gateway. Failure to send mandatory variables to the gateway will result in an error. If this is marked with "Yes", check the comments section also as there may be specific situations when it is not mandatory.

Comments:

This field should be read thoroughly to determine if they are relevant to the integration you are performing. This field may contain information explaining more in depth the variables use and/or assist in determining if it is indeed mandatory or not.

Data Types

Data Type	Description
N	Numeric – only numbers allowed
A	Alpha – any printable character is allowed
B	Boolean – only TRUE or FALSE are allowed
-	Special types – these variables only allow a specific set of values. Details of the allowed values are given in the comments section

Result Delivery Methods

Merchant's systems need to know the result for each completed transaction. The Server Result Methods determine how the transaction results are delivered back to the merchants system. They all have their own reasons to choose/not choose them. This is a decision that the merchant must make. Below is some information to help decide which method is most suited. Once decided, there is a section in this document for each of the methods to explain the implementation and its requirements in more detail.

POST

Choosing the POST method will deliver the full results via the customer's browser as a form post back to the CallbackURL. This is usually the least difficult method to implement. The downside is, if the CallbackURL does not begin with HTTPS (notice the significance of the S), then the connection is not secure. If that is the case, most modern browsers throw a security warning to the customer explaining that sensitive information is being passed over to an insecure connection. We **do not** send sensitive information back, but the browsers are trying to safeguard the customer. As a result, we show the customer a dialog informing them of the reason why they are about to see a security warning and how to handle it.

The next two Server Result Methods exchange the transaction results directing with the merchants system and the payment page (removing the customer's browser from the process).

SERVER

When chosen, the results are PUSHED TO the ServerResultURL on the merchant's website BEFORE the customer is redirected back to the merchant's site. This has the advantage of getting around the modern security warning if the merchant is not using HTTPS (Secure Connection). The downside is, this is probably the hardest of the methods to implement.

SERVER_PULL

When chosen, the results are PULLED FROM the payment form by the merchant's system AFTER the customer has been redirected back to the website. This has the advantage of getting around the modern security warning if you're not using HTTPS (Secure Connection). Its downside, it is not necessarily the easiest of the methods to implement.

Required Input Variables

Below is a description of the variables that comprise the input API of the payment form. These variables are delivered as **form** variables. These variables are a consistent requirement irrespective of which result delivery method that is chosen.

Variable Name	Data Type	Max Length	Mandatory or Always Present	Comments
HashDigest	A	-	Yes	A hashed string that contains all the variables passed and also data that is not passed but is known to both sides - namely the PreSharedKey and the gateway account password. (see section below)
MerchantID	A	15	Yes	The merchant ID that corresponds to the gateway account the transaction will be run through. NOTE: If this variable is not present, then the skinning of the payment form will not happen
Amount	N	13	Yes	The transaction amount in minor currency – e.g. for £10.00, it must be submitted as 1000
CurrencyCode	N	3	Yes	The currency of the transaction. ISO 4217 e.g. GBP: 826
EchoAVSCheckResult	B	true/false	No	Instructs the payment form to include the AVS check result of the transaction in the output variables
EchoCV2CheckResult	B	true/false	No	Instructs the payment form to include the CV2 check result of the transaction in the output variables
EchoThreeDSecureAuthenticationCheckResult	B	true/false	No	Instructs the payment form to include the 3D Secure check result of the transaction in the output variables
EchoCardType	B	true/false	No	Instructs the payment form to include the card type of the transaction in the output variables
EchoCardNumberFirstSix	B	true/false	No	Instructs the payment form to include the first

				6 digits of the card number of the transaction in the output variables
EchoCardNumberLastFour	B	true/false	No	Instructs the payment form to include the last 4 digits of the card number of the transaction in the output variables
EchoCardExpiryDate	B	true/false	No	Instructs the payment form to include the expiry date of the card of the transaction in the output variables
EchoDonationAmount	B	true/false	No	Instructs the payment form to include the donation amount of the transaction in the output variables
AVSOverridePolicy	A	4	No	Sets the override AVS checking policy for this transaction
CV2OverridePolicy	A	2	No	Sets the CV2 checking policy for this transaction
ThreeDSecureOverridePolicy	B	true/false	No	Instructs the payment form to enable/disable the 3D Secure checking for this transaction (where possible)
OrderID	A	50	Yes	A merchant side ID for the order – primarily used to for determining duplicate transactions. Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	-	-	Yes	Must be either SALE or PREAUTH
TransactionDateTime	DT	-	Yes	The date & time (as seen by the merchant's server) of the transaction. Needs to be in the form "YYYY-MM-DD HH:MM:SS ±OO:OO", with the time in 24 hour format, where OO:OO is the offset from UTC - e.g. "2008-12-01 14:12:00

				+01:00"
CallbackURL	A	-	See Comments	The URL of the page on the merchant's site that the results of the transaction will be posted back to (see section below). Required in all cases other than when PaymentFormDisplaysR result is set to true
OrderDescription	A	256	No	A description for the order. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	A	100	No	The name of the customer
Address1	A	100	No	Customer's billing address line 1
Address2	A	50	No	Customer's billing address line 2
Address3	A	50	No	Customer's billing address line 3
Address4	A	50	No	Customer's billing address line 4
City	A	50	No	Customer's billing address city
State	A	50	No	Customer's billing address state
PostCode	A	50	No	Customer's billing address post code
CountryCode	N	3	No	Customer's billing country code. ISO 3166-1 e.g. United Kingdom: 826
EmailAddress	A	100	No	Customer's email address
PhoneNumber	A	30	No	Customer's phone number
DateOfBirth	A	30	No	Customer's date of birth. Must be formatted as YYYY-MM-DD
EmailAddressEditable	B	true/false	No	Control variable that determines whether the Email Address field on the payment form will be editable
PhoneNumberEditable	B	true/false	No	Control variable that determines whether the Phone Number field on the payment form will be editable

DateOfBirthEditable	B	true/false	No	Control variable that determines whether the Date Of Birth field on the payment form will be editable
CV2Mandatory	B	true/false	No	Control variable that determines whether the CV2 field on the payment form will be mandatory
Address1Mandatory	B	true/false	No	Control variable that determines whether the Address1 field on the payment form will be mandatory
CityMandatory	B	true/false	No	Control variable that determines whether the City field on the payment form will be mandatory
PostCodeMandatory	B	true/false	No	Control variable that determines whether the PostCode field on the payment form will be mandatory
StateMandatory	B	true/false	No	Control variable that determines whether the State field on the payment form will be mandatory
CountryMandatory	B	true/false	No	Control variable that determines whether the Country field on the payment form will be mandatory
ResultDeliveryMethod	A	POST / SERVER / SERVER_P ULL	Yes	The delivery method of the payment result, must be either POST, SERVER or SERVER_PULL. (Please see Result Delivery Method section).
ServerResultURL	A	-	See Comments	The merchant's external server URL. Only used for SERVER result delivery method
PaymentFormDisplaysResult	B	true/false	See Comments	Boolean that determines whether the payment result will be displayed on the PaymentForm page, or redirected to the merchant's site after a response from the merchant's external server

				(ServerResultURL). Only used for SERVER result delivery method
PrimaryAccountName	A	100	No	The name of the primary account holder (used for MCC 6012 accounts only)
PrimaryAccountNumber	A	50	No	The account number of the primary account (used for MCC 6012 accounts only)
PrimaryAccountDateOfBirth	A	10	No	The date of birth of the primary account holder (used for MCC 6012 accounts only). Should be in the format yyyy-mm-dd (e.g. 1983-11-20)
PrimaryAccountPostCode	A	50	No	The post code of the primary account holder (used for MCC 6012 accounts only)

Incoming Hash Digest

Below is the order that the variables should be listed when creating the hash digest. The string to be hashed must be comprised of the variables listed in the order below in standard URL format (i.e. listed in name/value pairs, delimited with an ampersand character e.g. "variable1=value&variable2=value&variable3=value"). The variable names and values are case-sensitive and the values should be represented EXACTLY as they appear in the form (NON-URL ENCODED). This hash must be checked against the one submitted in the form, and it should be exactly the same as the hash digest created by us. Any differences should be treated with EXTREME caution, as this indicates that the variables in the form have been tampered with.

Variable Name	Mandatory or Always Present	Comments
PreSharedKey	See comments	The pre shared key should ONLY be included in the hash digest if the chosen hash method is standard (i.e. not HMAC) MD5 or SHA1. If the chosen hash method is either HMACMD5 or HMACSHA1, then the pre shared key is used as part of the hash generation so should be ENTIRELY omitted from the string to be hashed - if it is present in these cases (even as an empty string), then an error will be thrown
MerchantID	Yes	
Password	Yes	
Amount	Yes	

CurrencyCode	Yes	
EchoAVSCheckResult	Yes	Must be included as "EchoAVSCheckResult=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoCV2CheckResult	Yes	Must be included as "EchoCV2CheckResult=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoThreeDSecureAuthenticationCheckResult	Yes	Must be included as "EchoThreeDSecureAuthenticationCheckResult=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoCardType	Yes	Must be included as "EchoCardType=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoCardNumberFirstSix	Yes	Must be included as "EchoCardNumberFirstSix=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoCardNumberLastFour	Yes	Must be included as "EchoCardNumberLastFour=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoCardExpiryDate	Yes	Must be included as "EchoCardExpiryDate=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EchoDonationAmount	Yes	Must be included as "EchoDonationAmount=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
AVSOverridePolicy	Yes	Must be included as "AVSOverridePolicy=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CV2OverridePolicy	Yes	Must be included as "CV2OverridePolicy=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
ThreeDSecureOverridePolicy	Yes	Must be included as "ThreeDSecureOverridePolicy=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
OrderID	Yes	Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	Yes	
TransactionDateTime	Yes	
CallbackURL	Yes	
OrderDescription	Yes	Must be included as "OrderDescription=" if not submitted or empty in the form. Note: make sure that special characters in the

		OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	Yes	Must be included as "CustomerName=" if not submitted or empty in the form
Address1	Yes	Must be included as "Address1=" if not submitted or empty in the form
Address2	Yes	Must be included as "Address2=" if not submitted or empty in the form
Address3	Yes	Must be included as "Address3=" if not submitted or empty in the form
Address4	Yes	Must be included as "Address4=" if not submitted or empty in the form
City	Yes	Must be included as "City=" if not submitted or empty in the form
State	Yes	Must be included as "State=" if not submitted or empty in the form
PostCode	Yes	Must be included as "PostCode=" if not submitted or empty in the form
CountryCode	Yes	Must be included as "CountryCode=" if not submitted or empty in the form
EmailAddress	Yes	Must be included as "EmailAddress=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PhoneNumber	Yes	Must be included as "PhoneNumber=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
DateOfBirth	Yes	Must be included as " DateOfBirth =" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
EmailAddressEditable	Yes	Must be included as "EmailAddressEditable=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PhoneNumberEditable	Yes	Must be included as "PhoneNumberEditable=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
DateOfBirthEditable	Yes	Must be included as " DateOfBirthEditable =" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CV2Mandatory	Yes	Must be included as "CV2Mandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
Address1Mandatory	Yes	Must be included as "Address1Mandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CityMandatory	Yes	Must be included as "CityMandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)

PostCodeMandatory	Yes	Must be included as "PostCodeMandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
StateMandatory	Yes	Must be included as "StateMandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
CountryMandatory	Yes	Must be included as "CountryMandatory=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
ResultDeliveryMethod	Yes	Please see the Result Delivery Method section.
ServerResultURL	Yes	Must be included as "ServerResultURL=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PaymentFormDisplaysResult	Yes	Must be included as "PaymentFormDisplaysResult=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountName	Yes	Must be included as " PrimaryAccountName=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountNumber	Yes	Must be included as " PrimaryAccountNumber=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountName	Yes	Must be included as "PrimaryAccountName=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountNumber	Yes	Must be included as "PrimaryAccountNumber=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountDateOfBirth	Yes	Must be included as " PrimaryAccountDateOfBirth=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)
PrimaryAccountPostCode	Yes	Must be included as " PrimaryAccountPostCode=" if empty in the form. NOT included in the hash if not present in the form (only for backward compatibility)

Result Delivery Methods – Implementation

POST Result Delivery Method

Below are the variable outputs from the gateway during the stages in the POST Result Delivery Method. Also, the required hashing variables are listed separately, and in what order to use them during variable hashing. As explained above, this will help identify variable tampering.

Output Variables

Below is a description of the variables which will be posted back to the Merchants CallbackURL. These comprise the output API of the payment form.

Variable Name	Data Type	Max Length	Comments
HashDigest	A	-	A hashed string that contains all the variables passed and also data that is not passed but is known to both sides - namely the PreSharedKey and the gateway account password. (see section below)
MerchantID	A	15	The merchant ID that was used to process the transaction
StatusCode	N	-	This indicates the status of the transaction: <ul style="list-style-type: none"> • 0: transaction successful • 4: card referred • 5: card declined • 20: duplicate transaction • 30: exception
Message	A	512	This gives a more detailed description of the status of the transaction
PreviousStatusCode	N	-	If the transaction was deemed to be a duplicate transaction, this indicates the status of the previous transaction
PreviousMessage	A	512	If the transaction was deemed to be a duplicate transaction, this gives a more detailed description of the status of the previous transaction
CrossReference	A	24	This is the unique cross reference for this transaction. If the transaction was determined to be a duplicate transaction, this value will hold the cross reference of the previous transaction (which this transaction was deemed a duplicate of)
AddressNumericCheckResult	A	-	If requested (input variable "EchoAVSCheckResult = true") this gives the results of the address numeric check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
PostCodeCheckResult	A	-	If requested (input variable "EchoAVSCheckResult = true") this gives the results of the post code check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
CV2CheckResult	A	-	If requested (input variable "EchoCV2CheckResult = true") this gives the results of the CV2 check – will be PASSED, FAILED, NOT_CHECKED or UNKNOWN
ThreeDSecureAuthenticationCheckResult	A	-	If requested (input variable "EchoThreeDSecureAuthenticationCheckResult = true") this gives the results of the 3D Secure check - will be PASSED, FAILED,

			NOT_CHECKED or UNKNOWN
CardType	A	-	If requested (input variable "EchoCardType = true") this gives the card type of the transaction
CardClass	A	-	If requested (input variable "EchoCardType = true") this gives the card class of the transaction
CardIssuer	A	-	If requested (input variable "EchoCardType = true") this gives the card issuer (if known)
CardIssuerCountryCode	N	3	If requested (input variable "EchoCardType = true") this gives the 3 digit code of the country the card was issued in (if known)
CardNumberFirstSix	N	6	If requested (input variable "EchoCardNumberFirstSix = true") this gives the first 6 digits of the card number of the transaction
CardNumberLastFour	N	4	If requested (input variable "EchoCardNumberLastFour = true") this gives the last 4 digits of the card number of the transaction
CardExpiryDate	DT	5	If requested (input variable "EchoCardExpiryDate = true") this gives the expiry date of the card of the transaction. Will be in the form "MM/YY" e.g. "12/14"
Amount	N	13	The amount, in minor currency, of the transaction that was processed
DonationAmount	N	13	If requested (input variable "EchoDonationAmount = true") this gives the donation amount in minor currency
CurrencyCode	N	3	The currency code of the transaction that was processed. ISO 4217 e.g. GBP: 826
OrderID	A	50	The order ID of the transaction that was processed. Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	-	-	The transaction type of the transaction that was processed. Will be either SALE or PREAUTH
TransactionDateTime	DT	-	The date & time (as seen by the gateway server) of the transaction. Will be in the form "YYYY-MM-DD HH:MM:SS±OO:OO", with the time in 24 hour format, where OO:OO is the offset from UTC - e.g. "2008-12-01 14:12:00 +01:00"
OrderDescription	A	256	The order description of the transaction that was processed. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	A	100	The name of the customer as it was submitted to the gateway
Address1	A	100	Customer's billing address line 1 as it was submitted to the gateway

Address2	A	50	Customer's billing address line 2 as it was submitted to the gateway
Address3	A	50	Customer's billing address line 3 as it was submitted to the gateway
Address4	A	50	Customer's billing address line 4 as it was submitted to the gateway
City	A	50	Customer's billing city as it was submitted to the gateway
State	A	50	Customer's billing state as it was submitted to the gateway
PostCode	A	50	Customer's billing post code as it was submitted to the gateway
CountryCode	N	3	Customer's billing country code as it was submitted to the gateway. ISO 3166-1 e.g. United Kingdom: 826
EmailAddress	A	100	The customer's email address as it was submitted to the gateway
PhoneNumber	A	30	The customer's phone number as it was submitted to the gateway
DateOfBirth	A	30	The customer's date of birth as it was submitted to the gateway
PrimaryAccountName	A	100	The name of the primary account holder as it was submitted to the gateway
PrimaryAccountNumber	A	50	The account number of the primary account as it was submitted to the gateway
PrimaryAccountDateOfBirth	A	10	The date of birth of the primary account holder as it was submitted to the gateway
PrimaryAccountPostCode	A	50	The post code of the primary account holder as it was submitted to the gateway

Outgoing Hash Digest

Below is the order that the variables should be listed when creating the hash digest to check against the one in submitted in the form. The string to be hashed must be comprised of the variables listed in the order below in standard URL format (i.e. listed in name/value pairs, delimited with an ampersand character e.g. "variable1=value&variable2=value&variable3=value"). The variable names and values are case-sensitive and the values should be represented EXACTLY as they appear in the form (NON-URL ENCODED). This hash must be checked against the one submitted in the form, and it should be exactly the same as the hash digest created by us. Any differences should be treated with EXTREME caution, as this indicates that the variables in the form have been tampered with.

Variable Name	Mandatory	Comments
PreSharedKey	See comments	The pre shared key should ONLY be included in the hash digest if the chosen hash method is standard (i.e. not HMAC) MD5 or SHA1. If the chosen hash method is either HMACMD5 or HMACSHA1, then the pre shared key is used as part of the hash generation so should be ENTIRELY omitted from the string to be hashed
MerchantID	Yes	
Password	Yes	
StatusCode	Yes	
Message	Yes	
PreviousStatusCode	Yes	Must be included as "PreviousStatusCode=" if an empty variable in the form
PreviousMessage	Yes	Must be included as "PreviousMessage=" if an empty variable in the form
CrossReference	Yes	
AddressNumericCheckResult	Yes	Must be included as "AddressNumericCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PostCodeCheckResult	Yes	Must be included as "PostCodeCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CV2CheckResult	Yes	Must be included as "CV2CheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
ThreeDSecureAuthenticationCheckResult	Yes	Must be included as "ThreeDSecureAuthenticationCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardType	Yes	Must be included as "CardType=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardClass	Yes	Must be included as "CardClass=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardIssuer	Yes	Must be included as "CardIssuer=" if an empty

		variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardIssuerCountryCode	Yes	Must be included as "CardIssuerCountryCode=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardNumberFirstSix	Yes	Must be included as "CardNumberFirstSix=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardNumberLastFour	Yes	Must be included as "CardNumberLastFour=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardExpiryDate	Yes	Must be included as "CardExpiryDate=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
Amount	Yes	
DonationAmount	Yes	Must be included as "DonationAmount=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CurrencyCode	Yes	
OrderID	Yes	Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	Yes	
TransactionDateTime	Yes	
OrderDescription	Yes	Must be included as "OrderDescription=" if an empty variable in the form. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	Yes	Must be included as "CustomerName=" if an empty variable in the form
Address1	Yes	Must be included as "Address1=" if an empty variable in the form
Address2	Yes	Must be included as "Address2=" if an empty variable in the form
Address3	Yes	Must be included as "Address3=" if an empty variable in the form
Address4	Yes	Must be included as "Address4=" if an empty variable in the form
City	Yes	Must be included as "City=" if an empty variable in the form
State	Yes	Must be included as "State=" if an empty variable in the form
PostCode	Yes	Must be included as "PostCode=" if an empty variable in the form
CountryCode	Yes	Must be included as "CountryCode=" if an empty variable in the form
EmailAddress	Yes	Must be included as "EmailAddress=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards

		compatibility)
PhoneNumber	Yes	Must be included as "PhoneNumber=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
DateOfBirth	Yes	Must be included as " DateOfBirth =" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountName	Yes	Must be included as "PrimaryAccountName=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountNumber	Yes	Must be included as "PrimaryAccountNumber=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountDateOfBirth	Yes	Must be included as "PrimaryAccountDateOfBirth=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountPostCode	Yes	Must be included as "PrimaryAccountPostCode=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)

SERVER Result Delivery Method

Below are the variable outputs from the gateway during the multiple stages in the SERVER Result Delivery Method. Also, the required hashing variables are listed separately, and in what order to use them during variable hashing. As explained above, this will help identify variable tampering.

Request Variables Pushed To Merchants ServerResultURL

These are the transaction result variables that are PUSHED to the Merchants ServerResultURL AFTER the transaction has been processed, but BEFORE the customer is redirected back to the Merchants website.

Variable Name	Data Type	Max Length	Comments
HashDigest	A	-	A hashed string that contains all the variables passed and also data that is not passed but is known to both sides - namely the PreSharedKey and the gateway account password. (see section below)
MerchantID	A	15	The merchant ID that was used to process the transaction
StatusCode	N	-	This indicates the status of the transaction: <ul style="list-style-type: none"> • 0: transaction successful • 4: card referred • 5: card declined • 20: duplicate transaction • 30: exception
Message	A	512	This gives a more detailed description of the status of the transaction
PreviousStatusCode	N	-	If the transaction was deemed to be a duplicate transaction, this indicates the status of the previous transaction
PreviousMessage	A	512	If the transaction was deemed to be a duplicate transaction, this gives a more detailed description of the status of the previous transaction
CrossReference	A	24	This is the unique cross reference for this transaction. If the transaction was determined to be a duplicate transaction, this value will hold the cross reference of the previous transaction (which this transaction was deemed a duplicate of)
AddressNumericCheckResult	A	-	If requested (input variable "EchoAVSCheckResult = true") this gives the results of the address numeric check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
PostCodeCheckResult	A	-	If requested (input variable "EchoAVSCheckResult = true") this gives the results of the post code check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
CV2CheckResult	A	-	If requested (input variable "EchoCV2CheckResult = true") this gives the results of the CV2 check – will be PASSED, FAILED, NOT_CHECKED or UNKNOWN
ThreeDSecureAuthenticationCheckResult	A	-	If requested (input variable "EchoThreeDSecureAuthenticationCheckResult = true") this gives the results of the 3D Secure check - will be PASSED, FAILED, NOT_CHECKED or UNKNOWN

CardType	A	-	If requested (input variable "EchoCardType = true") this gives the card type of the transaction
CardClass	A	-	If requested (input variable "EchoCardType = true") this gives the card class of the transaction
CardIssuer	A	-	If requested (input variable "EchoCardType = true") this gives the card issuer (if known)
CardIssuerCountryCode	N	3	If requested (input variable "EchoCardType = true") this gives the 3 digit code of the country the card was issued in (if known)
CardNumberFirstSix	N	6	If requested (input variable "EchoCardNumberFirstSix = true") this gives the first 6 digits of the card number of the transaction
CardNumberLastFour	N	4	If requested (input variable "EchoCardNumberLastFour = true") this gives the last 4 digits of the card number of the transaction
CardExpiryDate	DT	5	If requested (input variable "EchoCardExpiryDate = true") this gives the expiry date of the card of the transaction. Will be in the form "MM/YY" e.g. "12/14"
Amount	N	13	The amount, in minor currency, of the transaction that was processed
DonationAmount	N	13	If requested (input variable "EchoDonationAmount = true") this gives the donation amount in minor currency
CurrencyCode	N	3	The currency code of the transaction that was processed. ISO 4217 e.g. GBP: 826
OrderID	A	50	The order ID of the transaction that was processed. Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	-	-	The transaction type of the transaction that was processed. Will be either SALE or PREAUTH
TransactionDateTime	DT	-	The date & time (as seen by the gateway server) of the transaction. Will be in the form "YYYY-MM-DD HH:MM:SS ±OO:OO", with the time in 24 hour format, where OO:OO is the offset from UTC - e.g. "2008-12-01 14:12:00 +01:00"
OrderDescription	A	256	The order description of the transaction that was processed. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	A	100	The name of the customer as it was submitted to the gateway
Address1	A	100	Customer's billing address line 1 as it was submitted to the gateway
Address2	A	50	Customer's billing address line 2 as it was submitted to the gateway
Address3	A	50	Customer's billing address line 3 as it was submitted to the gateway
Address4	A	50	Customer's billing address line 4 as it was submitted to the gateway
City	A	50	Customer's billing city as it was submitted to the gateway
State	A	50	Customer's billing state as it was submitted to the gateway
PostCode	A	50	Customer's billing post code as it was submitted to the gateway
CountryCode	N	3	Customer's billing country code as it was submitted to the gateway. ISO 3166-1 e.g. United Kingdom: 826
EmailAddress	A	100	The customer's email address as it was submitted to the gateway
PhoneNumber	A	30	The customer's phone number as it was submitted to the gateway

DateOfBirth	A	10	The customer's date of birth as it was submitted to the gateway
PrimaryAccountName	A	100	The name of the primary account holder as it was submitted to the gateway
PrimaryAccountNumber	A	50	The account number of the primary account as it was submitted to the gateway
PrimaryAccountDateOfBirth	A	10	The date of birth of the primary account holder as it was submitted to the gateway
PrimaryAccountPostCode	A	50	The post code of the primary account holder as it was submitted to the gateway

Request Hash Digest Pushed To Merchants ServerResultURL

Below is the order that the variables should be listed when creating the hash digest to check against the one in submitted in the form. The string to be hashed must be comprised of the variables listed in the order below in standard URL format (i.e. listed in name/value pairs, delimited with an ampersand character e.g. "variable1=value&variable2=value&variable3=value"). The variable names and values are case-sensitive and the values should be represented EXACTLY as they appear in the form (NON-URL ENCODED). This hash must be checked against the one submitted in the form, and it should be exactly the same as the hash digest created by us. Any differences should be treated with EXTREME caution, as this indicates that the variables in the form have been tampered with.

Variable Name	Mandatory	Comments
PreSharedKey	See comments	The pre shared key should ONLY be included in the hash digest if the chosen hash method is standard (i.e. not HMAC) MD5 or SHA1. If the chosen hash method is either HMACMD5 or HMACSHA1, then the pre shared key is used as part of the hash generation so should be ENTIRELY omitted from the string to be hashed
MerchantID	Yes	
Password	Yes	
StatusCode	Yes	
Message	Yes	
PreviousStatusCode	Yes	Must be included as "PreviousStatusCode=" if an empty variable in the form
PreviousMessage	Yes	Must be included as "PreviousMessage=" if an empty variable in the form
CrossReference	Yes	
AddressNumericCheckResult	Yes	Must be included as "AddressNumericCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PostCodeCheckResult	Yes	Must be included as "PostCodeCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CV2CheckResult	Yes	Must be included as "CV2CheckResult=" if an empty variable in the form. NOT included in the

		hash if not present in the form (only for backwards compatibility)
ThreeDSecureAuthenticationCheckResult	Yes	Must be included as "ThreeDSecureAuthenticationCheckResult=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardType	Yes	Must be included as "CardType=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardClass	Yes	Must be included as "CardClass=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardIssuer	Yes	Must be included as "CardIssuer=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardIssuerCountryCode	Yes	Must be included as "CardIssuerCountryCode=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardNumberFirstSix	Yes	Must be included as "CardNumberFirstSix=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardNumberLastFour	Yes	Must be included as "CardNumberLastFour=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CardExpiryDate	Yes	Must be included as "CardExpiryDate=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
Amount	Yes	
DonationAmount	Yes	Must be included as "DonationAmount=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
CurrencyCode	Yes	
OrderID	Yes	Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	Yes	
TransactionDateTime	Yes	
OrderDescription	Yes	Must be included as "OrderDescription=" if an empty variable in the form. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	Yes	Must be included as "CustomerName=" if an empty variable in the form
Address1	Yes	Must be included as "Address1=" if an empty variable in the form
Address2	Yes	Must be included as "Address2=" if an empty variable in the form
Address3	Yes	Must be included as "Address3=" if an empty variable in the form

Address4	Yes	Must be included as "Address4=" if an empty variable in the form
City	Yes	Must be included as "City=" if an empty variable in the form
State	Yes	Must be included as "State=" if an empty variable in the form
PostCode	Yes	Must be included as "PostCode=" if an empty variable in the form
CountryCode	Yes	Must be included as "CountryCode=" if an empty variable in the form
EmailAddress	Yes	Must be included as "EmailAddress=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PhoneNumber	Yes	Must be included as "PhoneNumber=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
DateOfBirth	Yes	Must be included as "DateOfBirth=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountName	Yes	Must be included as "PrimaryAccountName=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountNumber	Yes	Must be included as "PrimaryAccountNumber=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountDateOfBirth	Yes	Must be included as "PrimaryAccountDateOfBirth=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)
PrimaryAccountPostCode	Yes	Must be included as "PrimaryAccountPostCode=" if an empty variable in the form. NOT included in the hash if not present in the form (only for backwards compatibility)

Expected Response From Merchant's ServerResultURL

These are the response variables from the merchant's external server (ServerResultURL).

NOTE: the merchant's server MUST adhere to this specification. If the payment form CANNOT be sure that the results were delivered to the merchant's system, it WILL NOT redirect the customer back to the merchant's web shop, and will display the transaction result to the customer directly (regardless of the value of PaymentFormDisplaysResult). If this happens, an email will be sent to the merchant detailing the transaction result.

Variable Name	Data Type	Max Length	Comments
StatusCode	N	-	The StatusCode returned from the merchant's external server (ServerResultURL). This indicates whether the merchant's system successfully received and processed the transaction result
Message	A	-	In the case of a non-zero StatusCode from the merchant's system, this gives more information about the failure.

SERVER Output Variables

These are the output variables delivered to the merchant's CallbackURL after the transaction has been processed. These variables will be delivered as **query string** variables on the URL.

Variable Name	Data Type	Max Length	Comments
HashDigest	A	-	A hashed string that contains all the variables passed and also data that is not passed but is known to both sides - namely the PreSharedKey and the gateway account password. (see section below)
MerchantID	A	15	The merchant ID that was used to process the transaction
CrossReference	A	-	The unique CrossReference of the transaction
OrderID	A	-	The unique OrderID of the transaction

SERVER Output Hash Digest

Below is the order that the variables should be listed when creating the hash digest to check against the one in submitted in the form. The string to be hashed must be comprised of the variables listed in the order below in standard URL format (i.e. listed in name/value pairs, delimited with an ampersand character e.g. "variable1=value&variable2=value&variable3=value"). The variable names and values are case-sensitive and the values should be represented EXACTLY as they appear in the form (NON-URL ENCODED). This hash must be checked against the one submitted in the form, and it should be exactly the same as the hash digest created by us. Any differences should be treated with EXTREME caution, as this indicates that the variables in the form have been tampered with.

Variable Name	Mandatory	Comments
PreSharedKey	See comments	The pre shared key should ONLY be included in the hash digest if the chosen hash method is standard (i.e. not HMAC) MD5 or SHA1. If the chosen hash method is either HMACMD5 or HMACSHA1, then the pre shared key is used as part of the hash generation so should be ENTIRELY omitted from the string to be hashed
MerchantID	Yes	
Password	Yes	
CrossReference	Yes	
OrderID	Yes	

SERVER_PULL Result Delivery Method

Below are the variable outputs from the gateway during the multiple stages in the SERVER_PULL Result Delivery Method. Also, the required hashing variables are listed separately, and in what order to use them during variable hashing. As explained above, this will help identify variable tampering.

SERVER_PULL Output Variables

These are the output variables delivered to the merchant's CallbackURL after the transaction has been processed. These variables will be delivered as **query string** variables on the URL.

Variable Name	Data Type	Max Length	Comments
HashDigest	A	-	A hashed string that contains all the variables passed and also data that is not passed but is known to both sides - namely the PreSharedKey and the gateway account password. (see section below)
MerchantID	A	15	The merchant ID that was used to process the transaction
CrossReference	A	24	The unique CrossReference of the transaction
OrderID	A	50	The unique OrderID of the transaction

SERVER_PULL Output Hash Digest

Below is the order that the variables should be listed when creating the hash digest to check against the one in submitted in the form. The string to be hashed must be comprised of the variables listed in the order below in standard URL format (i.e. listed in name/value pairs, delimited with an ampersand character e.g. "variable1=value&variable2=value&variable3=value"). The variable names and values are case-sensitive and the values should be represented EXACTLY as they appear in the form (NON-URL ENCODED). This hash must be checked against the one submitted in the form, and it should be exactly the same as the hash digest created by us. Any differences should be treated with EXTREME caution, as this indicates that the variables in the form have been tampered with

Variable Name	Mandatory	Comments
PreSharedKey	See comments	The pre shared key should ONLY be included in the hash digest if the chosen hash method is standard (i.e. not HMAC) MD5 or SHA1. If the chosen hash method is either HMACMD5 or HMACSHA1, then the pre shared key is used as part of the hash generation so should be ENTIRELY omitted from the string to be hashed
MerchantID	Yes	
Password	Yes	
CrossReference	Yes	
OrderID	Yes	

SERVER_PULL Request Variables

These are the request variables directly posted by the merchant's website to our transaction result query handler. The external URL address to send the request to;

<https://mms.ThePaymentGateway.net/Pages/PublicPages/PaymentFormResultHandler.ashx>

Variable Name	Data Type	Max Length	Comments
MerchantID	A	-	The merchant ID that was used to process the transaction
Password	A	15	The password that corresponds to the gateway account
CrossReference	A	24	The unique CrossReference of the transaction

EchoAVSCheckResult	B	true/false	Instructs the transaction result query handler to include the AVS check result of the transaction in the transaction result variable list
EchoCV2CheckResult	B	true/false	Instructs the transaction result query handler to include the CV2 check result of the transaction in the transaction result variable list
EchoThreeDSecureAuthenticationCheckResult	B	true/false	Instructs the transaction result query handler to include the 3D Secure check result of the transaction in the transaction result variable list
EchoCardType	B	true/false	Instructs the transaction result query handler to include the card type of the transaction in the transaction result variable list
EchoCardNumberFirstSix	B	true/false	Instructs the transaction result query handler to include the first 6 digits of the card number of the transaction in the transaction result variable list
EchoCardNumberLastFour	B	true/false	Instructs the transaction result query handler to include the last 4 digits of the card number of the transaction in the transaction result variable list
EchoCardExpiryDate	B	true/false	Instructs the transaction result query handler to include the expiry date of the card of the transaction in the transaction result variable list
EchoDonationAmount	B	true/false	Instructs the transaction result query handler to include the donation amount of the transaction in the transaction result variable list

Transaction Result PULL Response

These are the response variables from our transaction result query handler.

Variable Name	Data Type	Max Length	Comments
StatusCode	A	-	This indicates the status of the transaction result query: 0: success 30: exception
Message	A	-	This gives a more detailed description of the status of the transaction result query
TransactionResult	A	-	This is the URL encoded transaction result (see below for transaction result structure). Note: If StatusCode=30 this variable will not be returned by the external sever

SERVER_PULL Transaction Result Variables

These are the transaction result variables. These variables are used to allow the merchant to display the payment result to the customer.

Variable Name	Data Type	Max Length	Comments
MerchantID	A	15	The merchant ID that was used to process the transaction
StatusCode	N	-	This indicates the status of the transaction: <ul style="list-style-type: none"> 0: transaction successful 4: card referred 5: card declined 20: duplicate transaction

			<ul style="list-style-type: none"> 30: exception
Message	A	512	This gives a more detailed description of the status of the transaction
PreviousStatusCode	N	-	If the transaction was deemed to be a duplicate transaction, this indicates the status of the previous transaction
PreviousMessage	A	512	If the transaction was deemed to be a duplicate transaction, this gives a more detailed description of the status of the previous transaction
CrossReference	A	24	This is the unique cross reference for this transaction. If the transaction was determined to be a duplicate transaction, this value will hold the cross reference of the previous transaction (which this transaction was deemed a duplicate of)
AddressNumericCheckResult	A	-	If requested (request variable "EchoAVSCheckResult = true") this gives the results of the address numeric check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
PostCodeCheckResult	A	-	If requested (request variable "EchoAVSCheckResult = true") this gives the results of the post code check – will be PASSED, FAILED, PARTIAL, NOT_CHECKED or UNKNOWN
CV2CheckResult	A	-	If requested (request variable "EchoCV2CheckResult = true") this gives the results of the CV2 check – will be PASSED, FAILED, NOT_CHECKED or UNKNOWN
ThreeDSecureAuthenticationCheckResult	A	-	If requested (request variable "EchoThreeDSecureAuthenticationCheckResult = true") this gives the results of the 3D Secure check - will be PASSED, FAILED, NOT_CHECKED or UNKNOWN
CardType	A	-	If requested (request variable "EchoCardType = true") this gives the card type of the transaction
CardClass	A	-	If requested (request variable "EchoCardType = true") this gives the card class of the transaction
CardIssuer	A	-	If requested (request variable "EchoCardType = true") this gives the card issuer (if known)
CardIssuerCountryCode	A	3	If requested (request variable "EchoCardType = true") this gives the 3 digit code of the country the card was issued in (if known)
CardNumberFirstSix	N	6	If requested (request variable "EchoCardNumberFirstSix = true") this gives the first 6 digits of the card number of the transaction
CardNumberLastFour	N	4	If requested (request variable "EchoCardNumberLastFour = true") this gives the last 4 digits of the card number of the transaction
CardExpiryDate	DT	5	If requested (request variable "EchoCardExpiryDate = true") this gives the expiry date of the card of the transaction. Will be in the form "MM/YY" e.g. "12/14"
Amount	N	13	The amount, in minor currency, of the transaction that was processed
DonationAmount	N	13	If requested (request variable "EchoDonationAmount = true") this gives the donation amount in minor currency
CurrencyCode	N	3	The currency code of the transaction that was processed. ISO 4217 e.g. GBP: 826
OrderID	A	50	The order ID of the transaction that was processed. Note: make sure that special characters in the OrderID are properly escaped, otherwise the hash digest will not match
TransactionType	-	-	The transaction type of the transaction that was processed. Will be either SALE or PREAUTH
TransactionDateTime	DT	-	The date & time (as seen by the gateway server) of the transaction. Will be in the form "YYYY-MM-DD HH:MM:SS ±OO:OO", with the time in 24 hour format, where OO:OO is the offset from UTC - e.g. "2008-12-

			01 14:12:00 +01:00"
OrderDescription	A	256	The order description of the transaction that was processed. Note: make sure that special characters in the OrderDescription are properly escaped, otherwise the hash digest will not match
CustomerName	A	100	The name of the customer as it was submitted to the gateway
Address1	A	100	Customer's billing address line 1 as it was submitted to the gateway
Address2	A	50	Customer's billing address line 2 as it was submitted to the gateway
Address3	A	50	Customer's billing address line 3 as it was submitted to the gateway
Address4	A	50	Customer's billing address line 4 as it was submitted to the gateway
City	A	50	Customer's billing city as it was submitted to the gateway
State	A	50	Customer's billing state as it was submitted to the gateway
PostCode	A	50	Customer's billing post code as it was submitted to the gateway
CountryCode	N	3	Customer's billing country code as it was submitted to the gateway. ISO 3166-1 e.g. United Kingdom: 826
EmailAddress	A	100	Customer's email address
PhoneNumber	A	30	Customer's phone number
DateOfBirth	A	10	The date of birth of the customer. Should be in the format yyyy-mm-dd (e.g. 1983-11-20)
PrimaryAccountName	A	100	The name of the primary account holder (used for MCC 6012 accounts only)
PrimaryAccountNumber	A	50	The account number of the primary account (used for MCC 6012 accounts only)
PrimaryAccountDateOfBirth	A	10	The date of birth of the primary account holder (used for MCC 6012 accounts only). Will be in the format yyyy-mm-dd (e.g. 1983-11-20)
PrimaryAccountPostCode	A	50	The post code of the primary account holder (used for MCC 6012 accounts only)

Appendix 1: Gateway Response StatusCodes

Below are the status codes likely to be received when integrating with the gateway.

Status Code	Transaction Result	Description
0	Successful	Transaction Authorised: The transaction was successful and you will be given an Authorisation Code as part of the message returned by the gateway.
3	Incomplete	Transaction Awaiting 3D Secure Authentication: Transaction is now awaiting 3D Secure Authentication from the customer. This status has a 2 hour expiry time set by the card scheme, at which point, the transaction will fail (Issuer Authentication Expired).
4	Referred	Transaction Referred: The card issuer has parked the transaction awaiting contact with the customer before proceeding to authorise or decline the transaction.
5	Declined	Transaction Failed: The transaction was declined by the card issuer or acquiring bank. In the event of the Address or CV2 verification failure, this will also be noted on the message from the gateway (Example, "Card declined: AVS policy + CV2 policy"). If the message given by the gateway only says "Card declined" with no other information, then no other information was given to us from the card issuer or acquiring bank as to the underlying reason why. The only person who can find out why the transaction was declined is the customer by contacting their bank directly.
20	Duplicate Transaction	The transaction which was processed was a duplicate. If this is the case, then the original transaction information is also passed back from the gateway so you can determine the result of the original transaction. Please refer to your respective integration method documentation form more information.
30	Failed (Error(s) Occurred)	Transaction Failed: This is usually an indicator that the integration to the gateway is incomplete and/or not working correctly. There will also be additional error information feedback from the gateway for merchants to determine what the error is specifically. Please refer to your respective integration methods documentation for more information.

Appendix 2: Transaction Data Flow

Listed below are the steps that a Transparent Redirect transaction will take. All of the methods are the same in the request and 3D Secure Authentication processes, but the handling of transaction results are different. There are also 3 diagrams to show the transaction data flow in different scenarios.


All Result Delivery Methods

1. The cardholder navigates to the merchant's website.
2. Once an order has been prepared, the customer is redirected to the payment gateway (Hosted Payment Form) and supplies their card details into the payment form.
3. The payment gateway contacts the Directory Server to query whether this card is enrolled in the 3D Secure scheme.
4. The Directory Server determines whether the card is enrolled in the 3DS scheme and passes this information back to the payment gateway.
 - a. If the card is enrolled in the 3D Secure Authentication Scheme, the transaction moves to step 5.
 - b. If not, the transaction moves to step 10.
5. The payment gateway passes the URL of the cardholder's bank's Access Control Server (ACSURL) and additional data from which a Payment Request string (PaREQ) is created, to the Hosted Payment Form.
6. The customer is then redirected by the Hosted Payment Form to their bank's Access Control Server (ACSURL) and they are greeted with the last 4 digits of their credit card & the identification text they specified when registering their card for 3D Secure.
7. The customer then validates their card details using their 3D Secure password, which is validated by their bank's Access Control Server.
8. The Access Control Server then initiates a redirect of the customer's browser back to a secure processing page on the payment gateway.
9. The payment gateway checks the contents of the payment response (PaRES).
 - a. If the transaction is declined (following a 3D Secure authentication failure), move to step 11.
 - b. If not, the transaction moves to step 10.
10. The payment gateway then submits the transaction to the bank for authorisation.


POST Result Delivery Method

11. The results of the transaction are then passed back to the merchant's system (CallbackURL).
The data passed to the Merchant's System should be checked for errors at this point.
 - a. **At this point, the payment processing has been completed. If the transaction was successful, money has been exchanged between banks.**
 - b. If errors occur with the results (for example; Variable Tampering), the merchant's system should stop the transaction from going any further and move to step 12.
 - c. If there is an error in the payment gateway being able to reach the merchant's system (Callback URL), an invalid URL for example, then **the transaction result is displayed on the payment gateway and the customer is not redirected back to the merchant's website** and the process does not go any further.
12. The merchant's system should display the transaction result to the customer (or desired error information if any occurred before this point).


POST Transaction Flow - Including 3D Secure Authentication

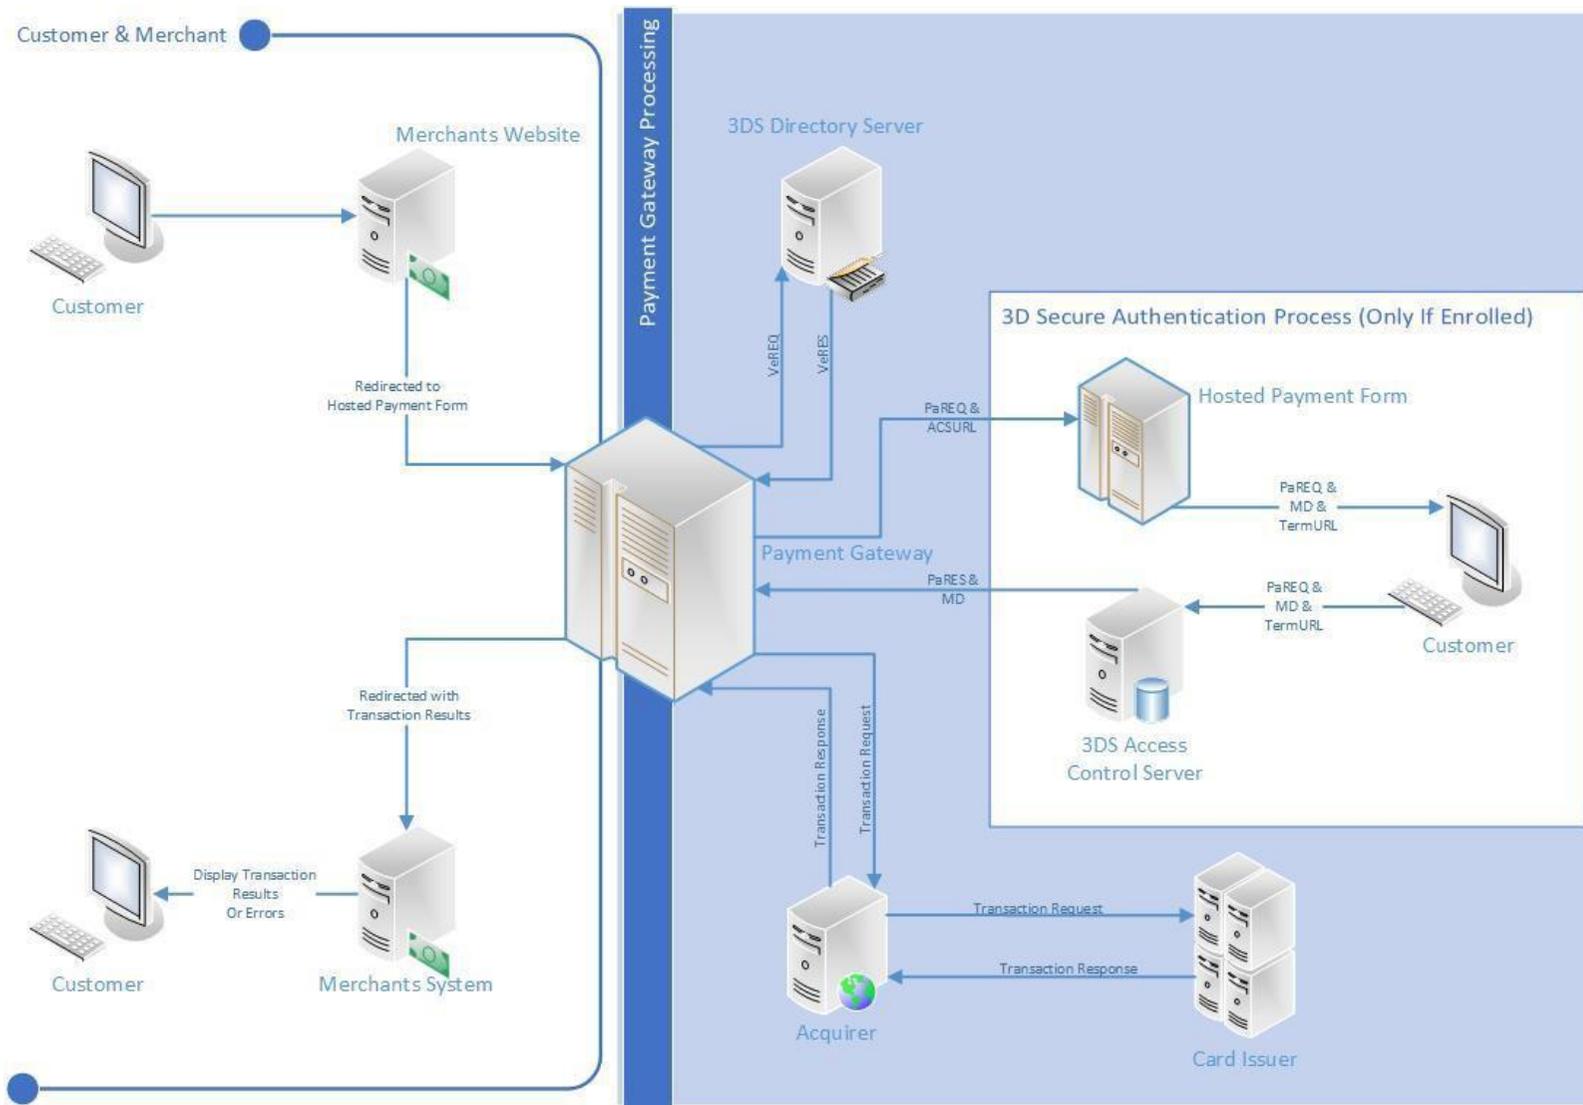

POST Transaction Flow - 3D Secure Card Not Enrolled

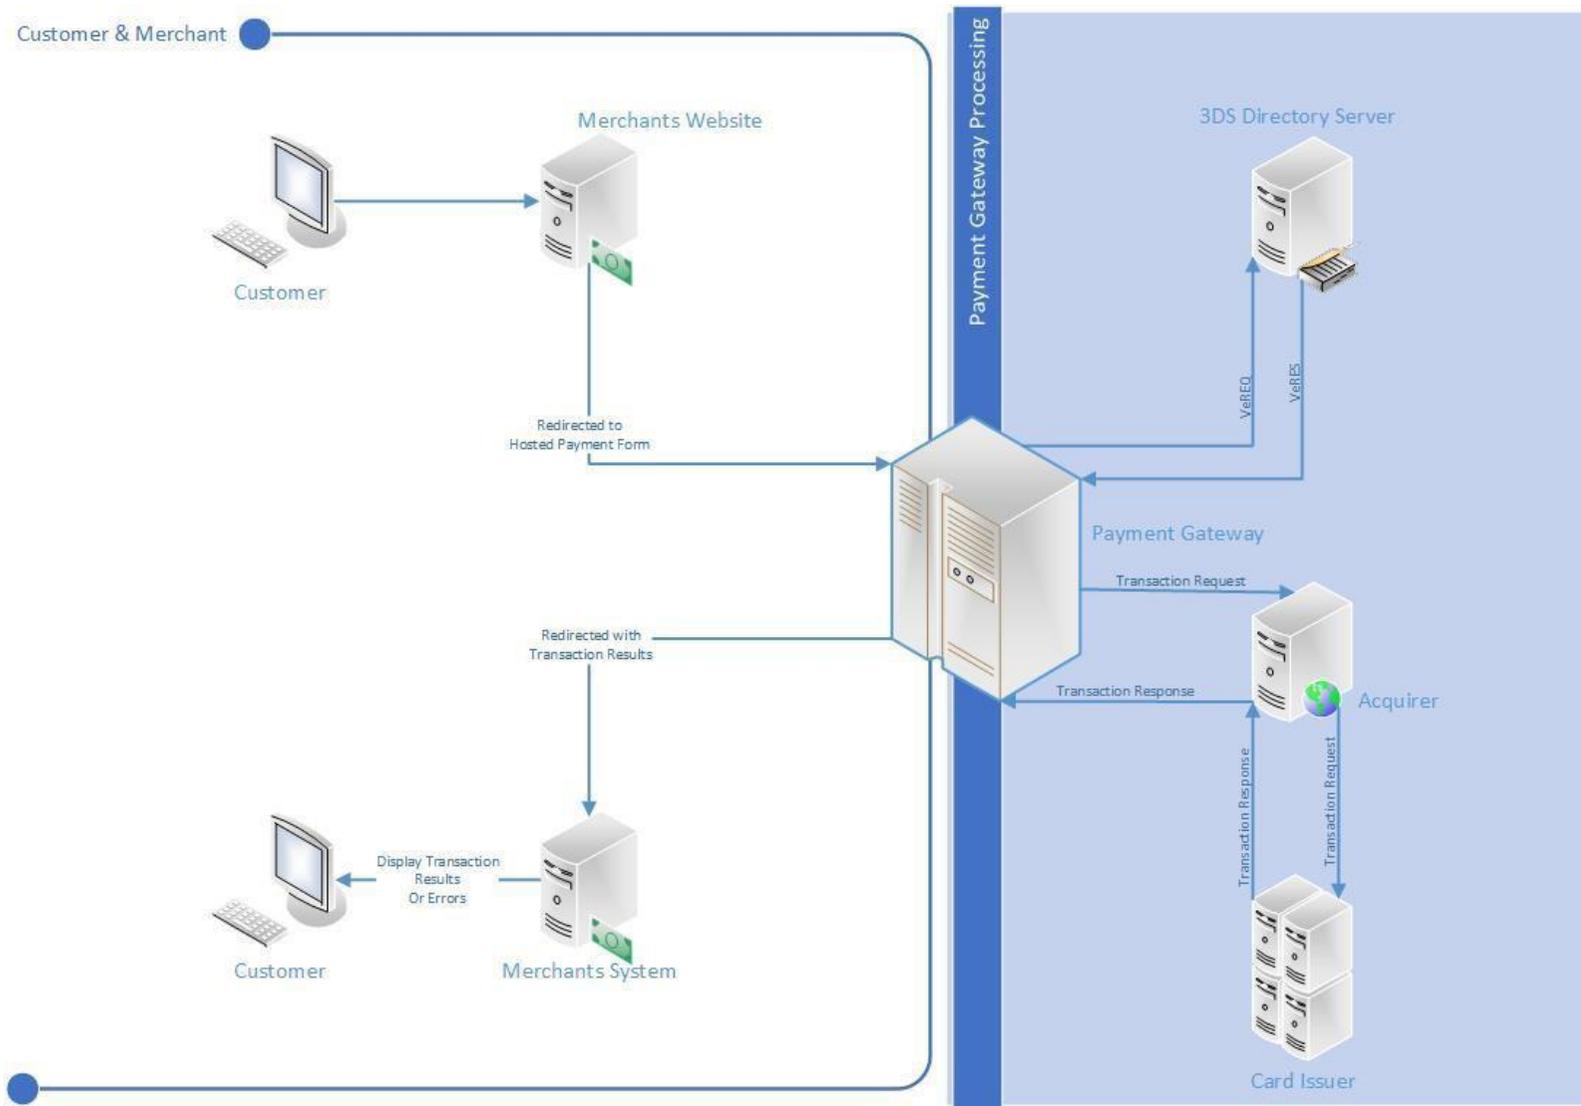


POST Transaction Flow - 3D Secure Disabled (MMS Settings)

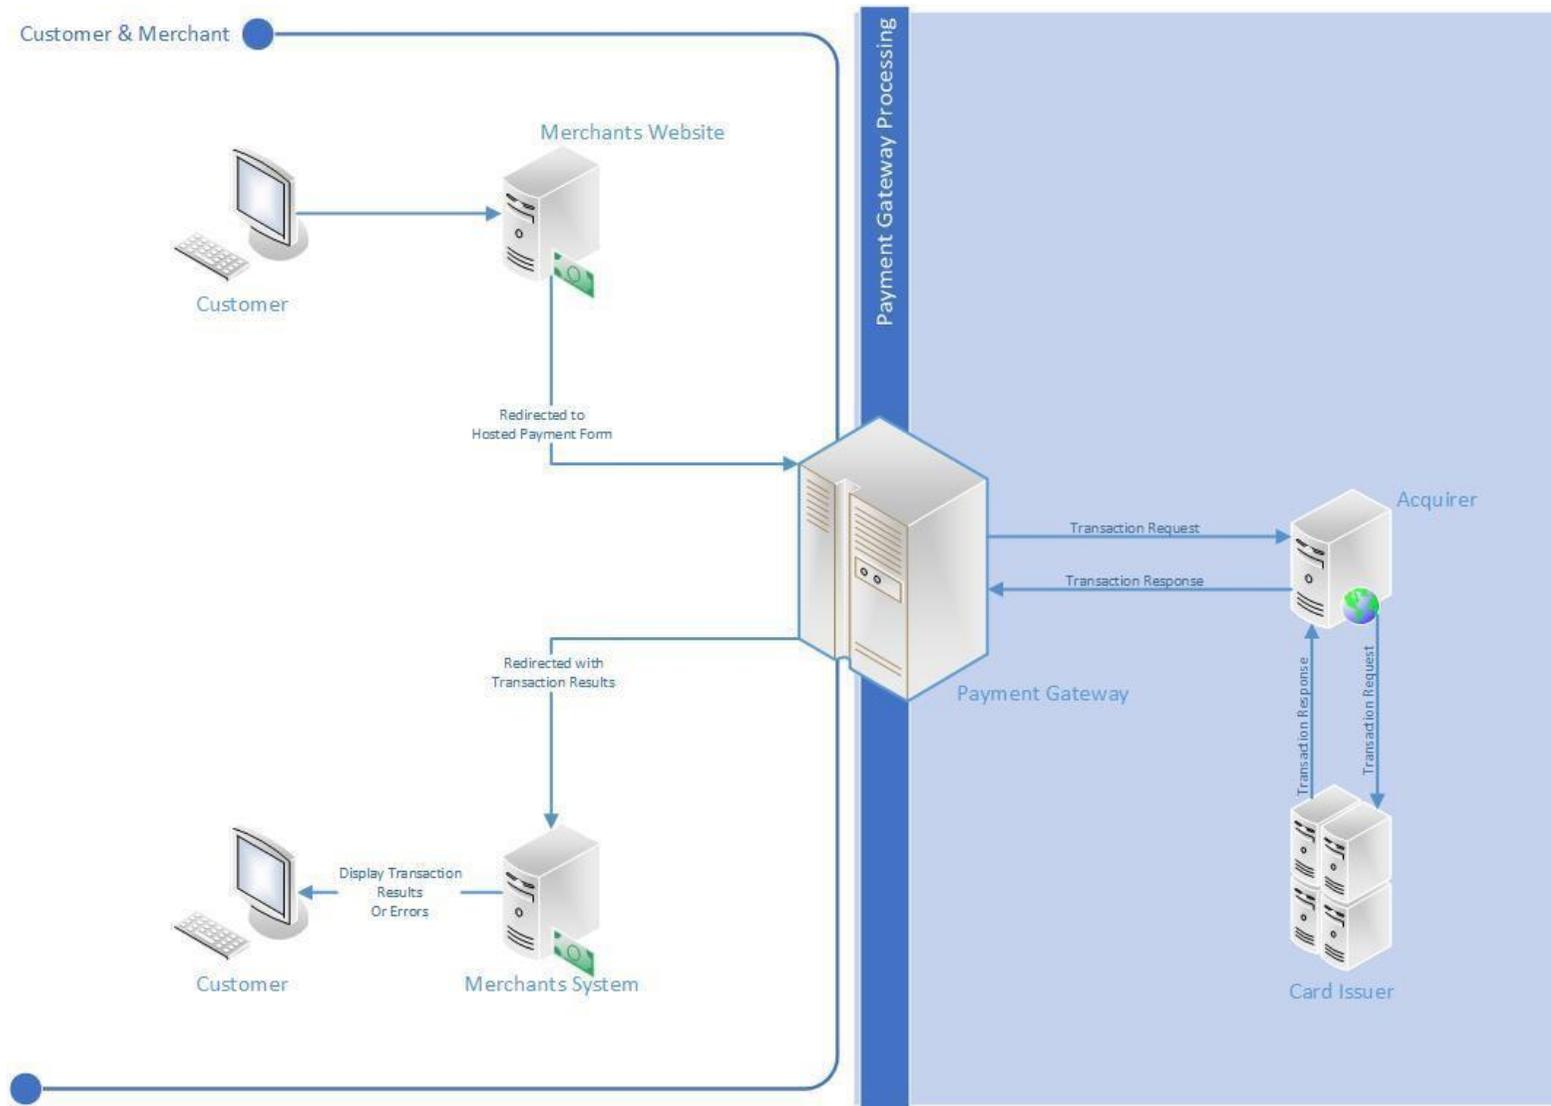


SERVER Result Delivery Method

10. The results of the transaction are then passed back to the merchant's system (ServerResultURL). This is a direct layer of communication without customer involvement or awareness. The data passed to the Merchant's System should be checked for errors at this point.
 - a. **At this point, the payment processing has been completed. If the transaction was successful, money has been exchanged between banks.**
 - b. If errors occur with the results (for example; Variable Tampering), the merchant's system should stop the transaction from going any further and move to step 14.
 - c. If there is an error in the payment gateway being able to reach the merchant's system (ServerResultURL), an invalid URL for example, then **the transaction result is displayed on the payment gateway and the customer is not redirected back to the merchant's website** and the process does not go any further.
11. The results are stored by the merchants system (ServerResultURL). The merchant can choose to store the results where they prefer, such as a database table or a secure file on the server.
12. The merchants system (ServerResultURL) then passes a response back to the payment gateway to advise whether the results were received ok, or not (variable tampering for example).
 - a. If the payment gateway receives any other response StatusCode other than 0, **the payment gateway will not redirect the customer back to the merchants system (CallbackURL) and will display the transaction result directly.** No further steps take place.
 - b. Upon a successful response from the merchants system (ServerResultURL), the payment gateway will redirect the customer back to the merchants system (CallbackURL), **unless the merchant supplied "PaymentFormDisplaysResult" set to TRUE as part of the initial transaction request sent to the Hosted Payment Form.** If the PaymentFormDisplaysResult was set to True at the time of the initial request, **the payment gateway will not redirect the customer back to the merchants system (CallbackURL) and will display the transaction result directly.** No further steps take place.
13. The merchants system (CallbackURL) will then retrieve the earlier stored transaction results.
14. The merchant's system should display the transaction result to the customer (or desired error information if any occurred before this point).


SERVER Transaction Flow – Including 3D Secure Authentication

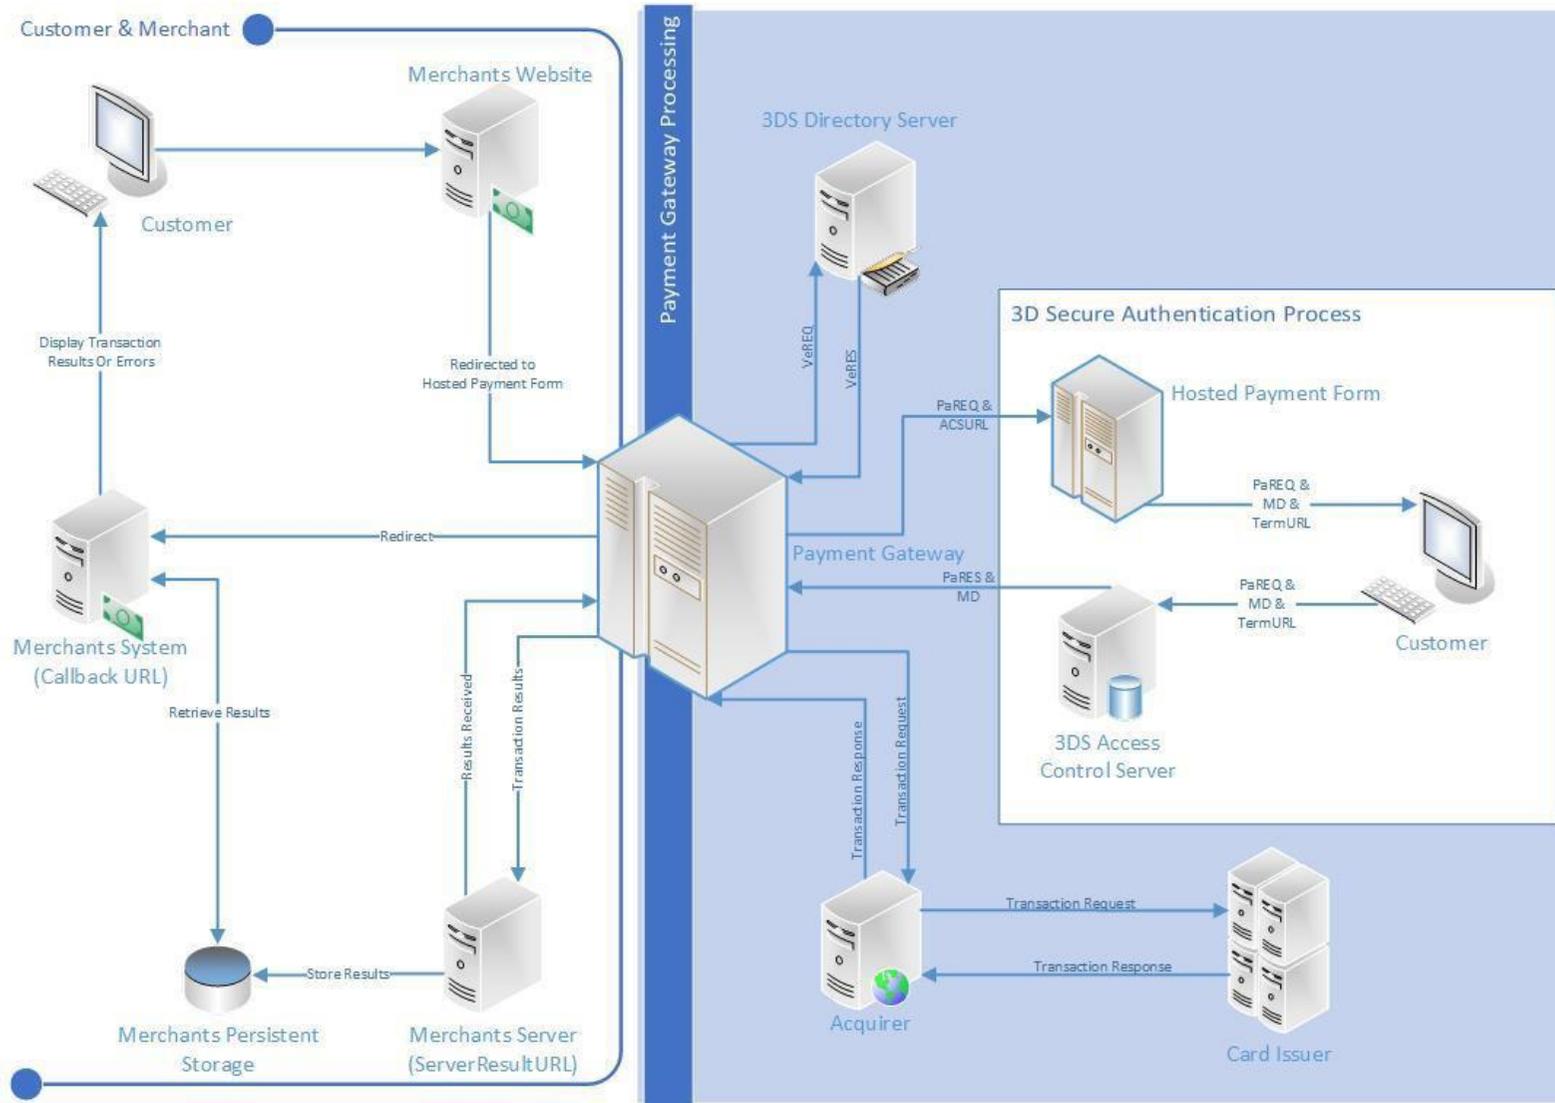

SERVER Transaction Flow – 3D Secure Card Not Enrolled

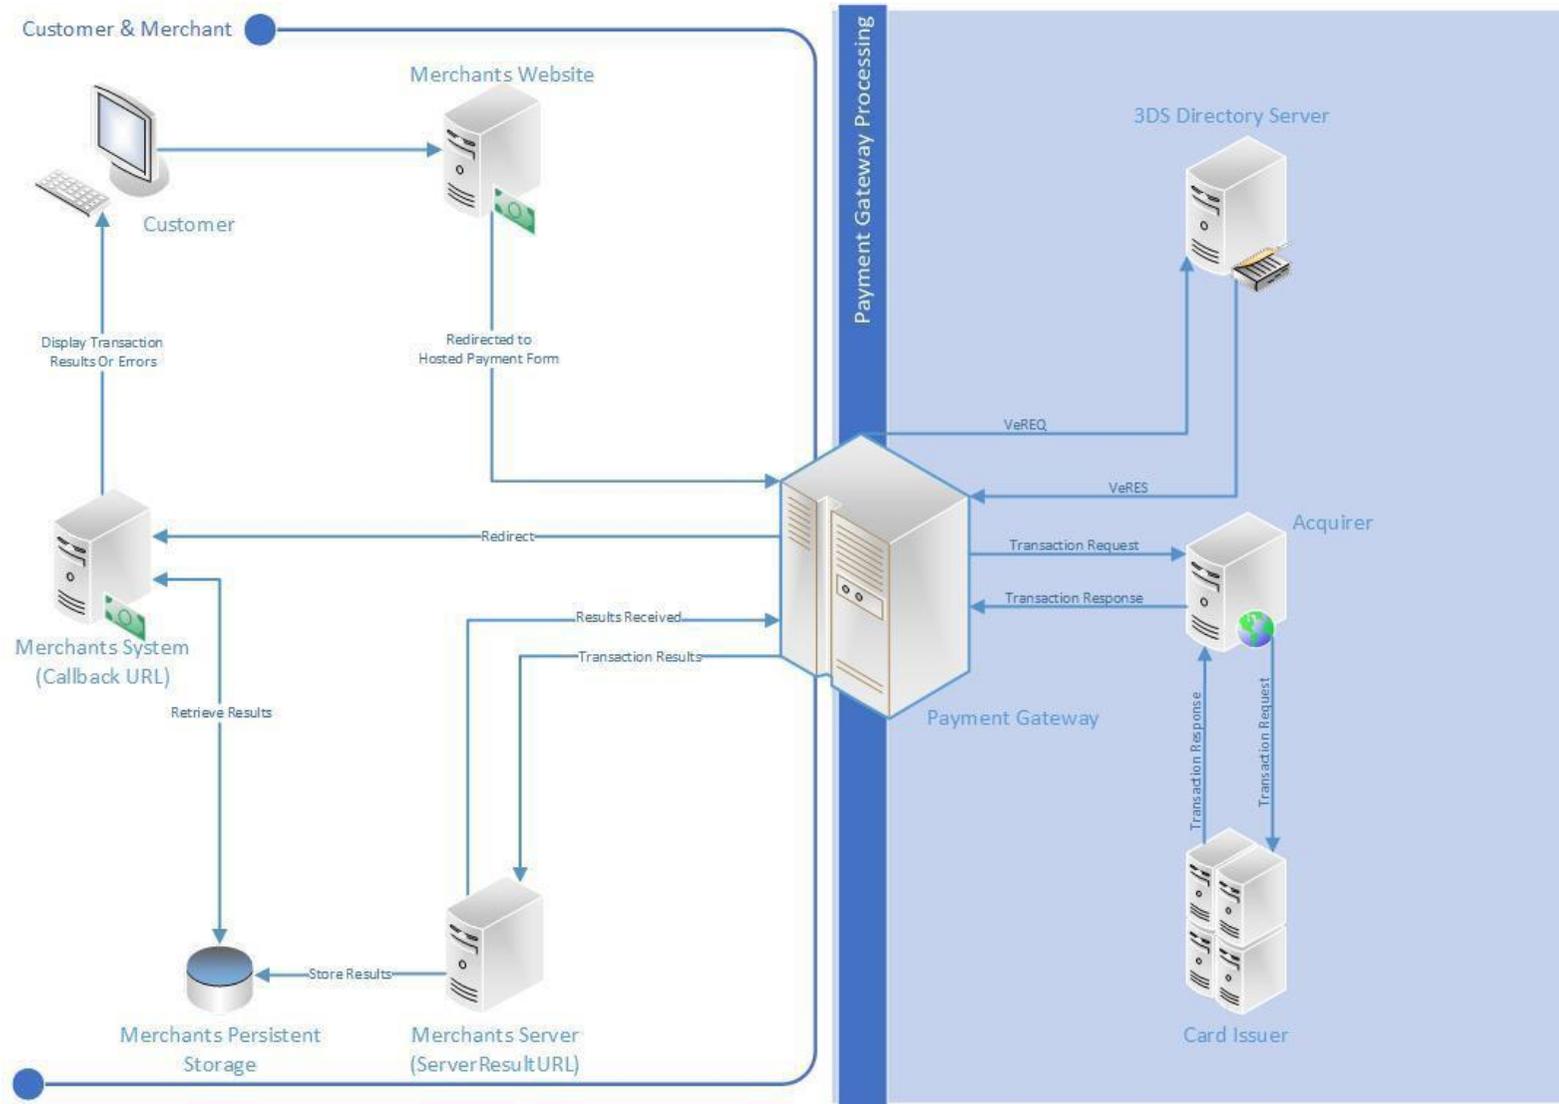


SERVER Transaction Flow – 3D Secure Disabled (MMS Settings)

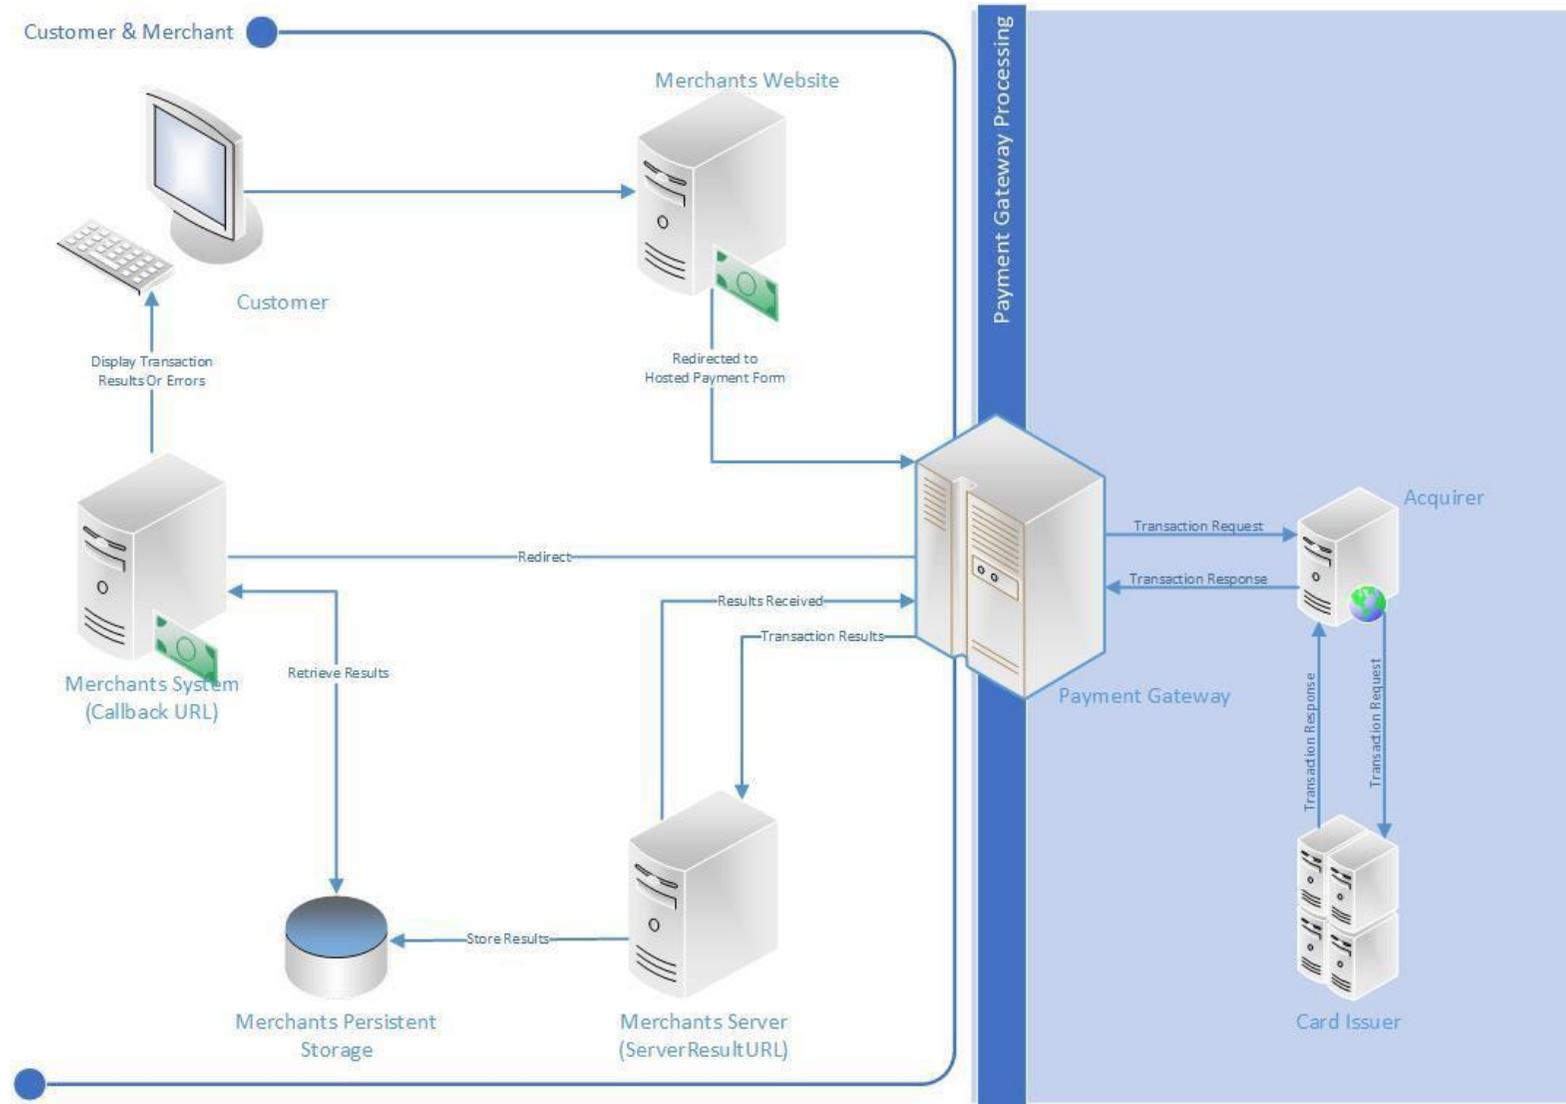


SERVER_PULL Result Delivery Method

13. The customer is redirected back to the merchant's system (CallbackURL). The data passed to the Merchant's System should be checked for errors at this point.
 - a. **At this point, the payment processing has been completed. If the transaction was successful, money has been exchanged between banks.**
 - b. If errors occur with the results (for example; Variable Tampering), the merchant's system should stop the transaction from going any further and move to step 11.
10. The merchant's system (CallbackURL) then "PULLS" the transaction results direct from payment gateway.
11. The merchant's system should display the transaction result to the customer (or desired error information if any occurred before this point).


SERVER_PULL Transaction Flow – Including 3D Secure Authentication

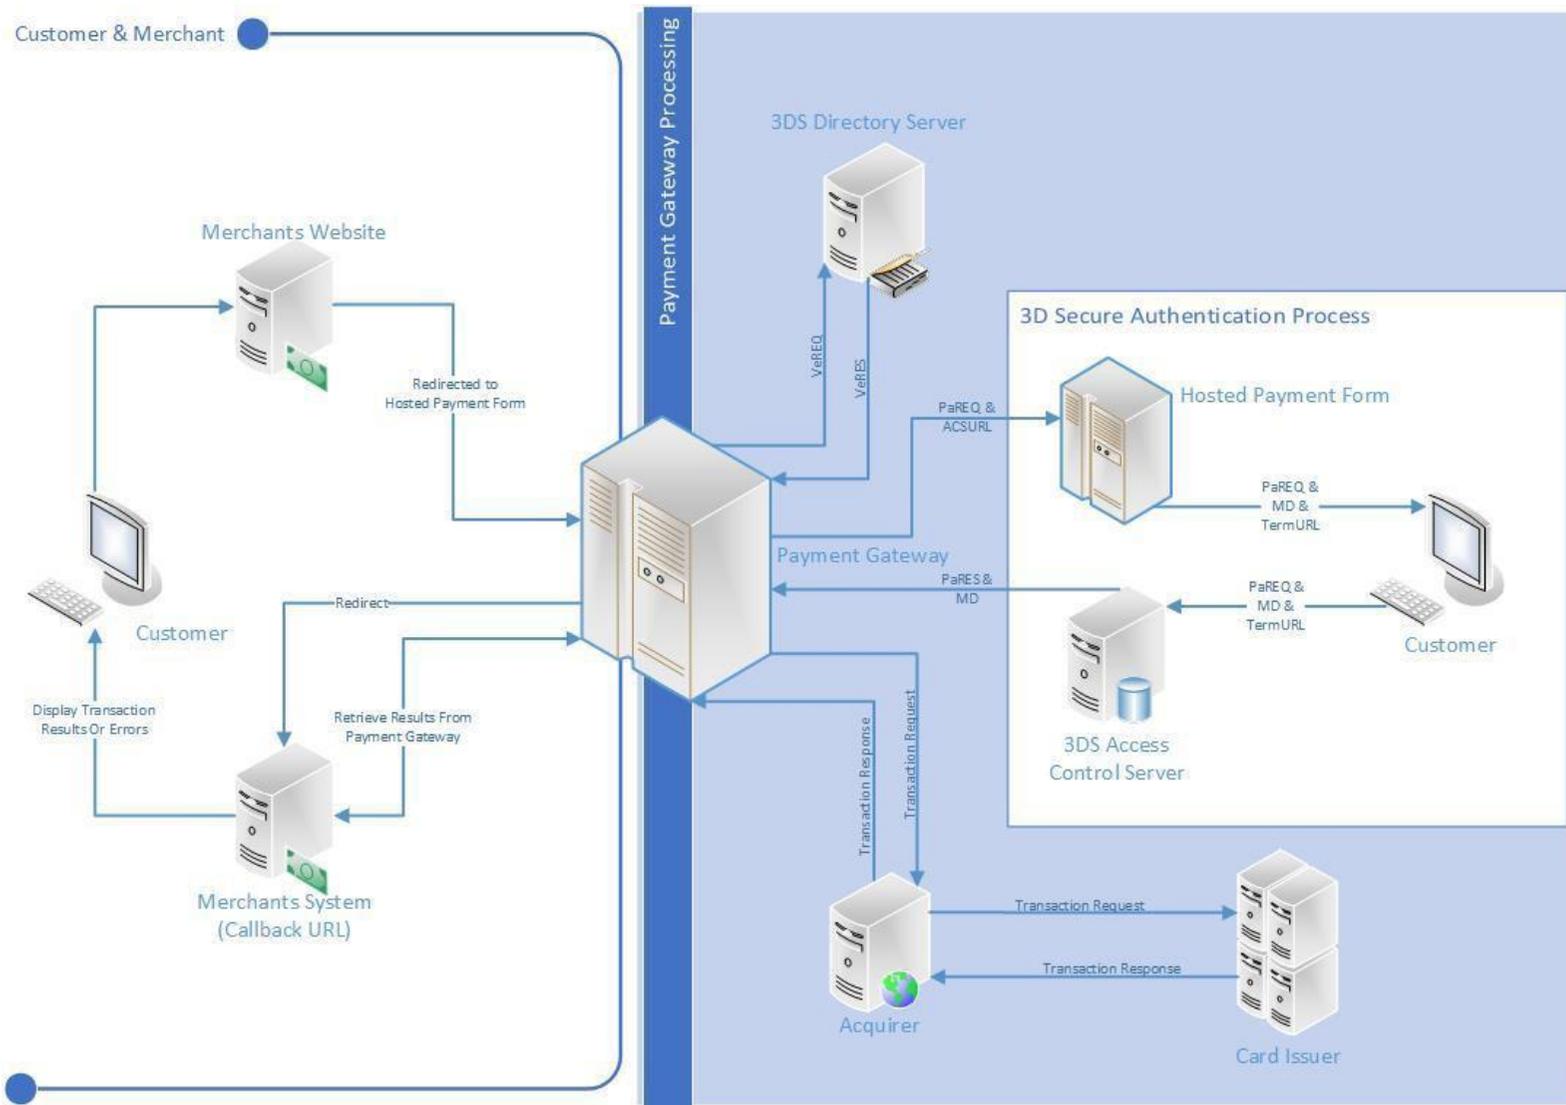

SERVER_PULL Transaction Flow – 3D Secure Card Not Enrolled

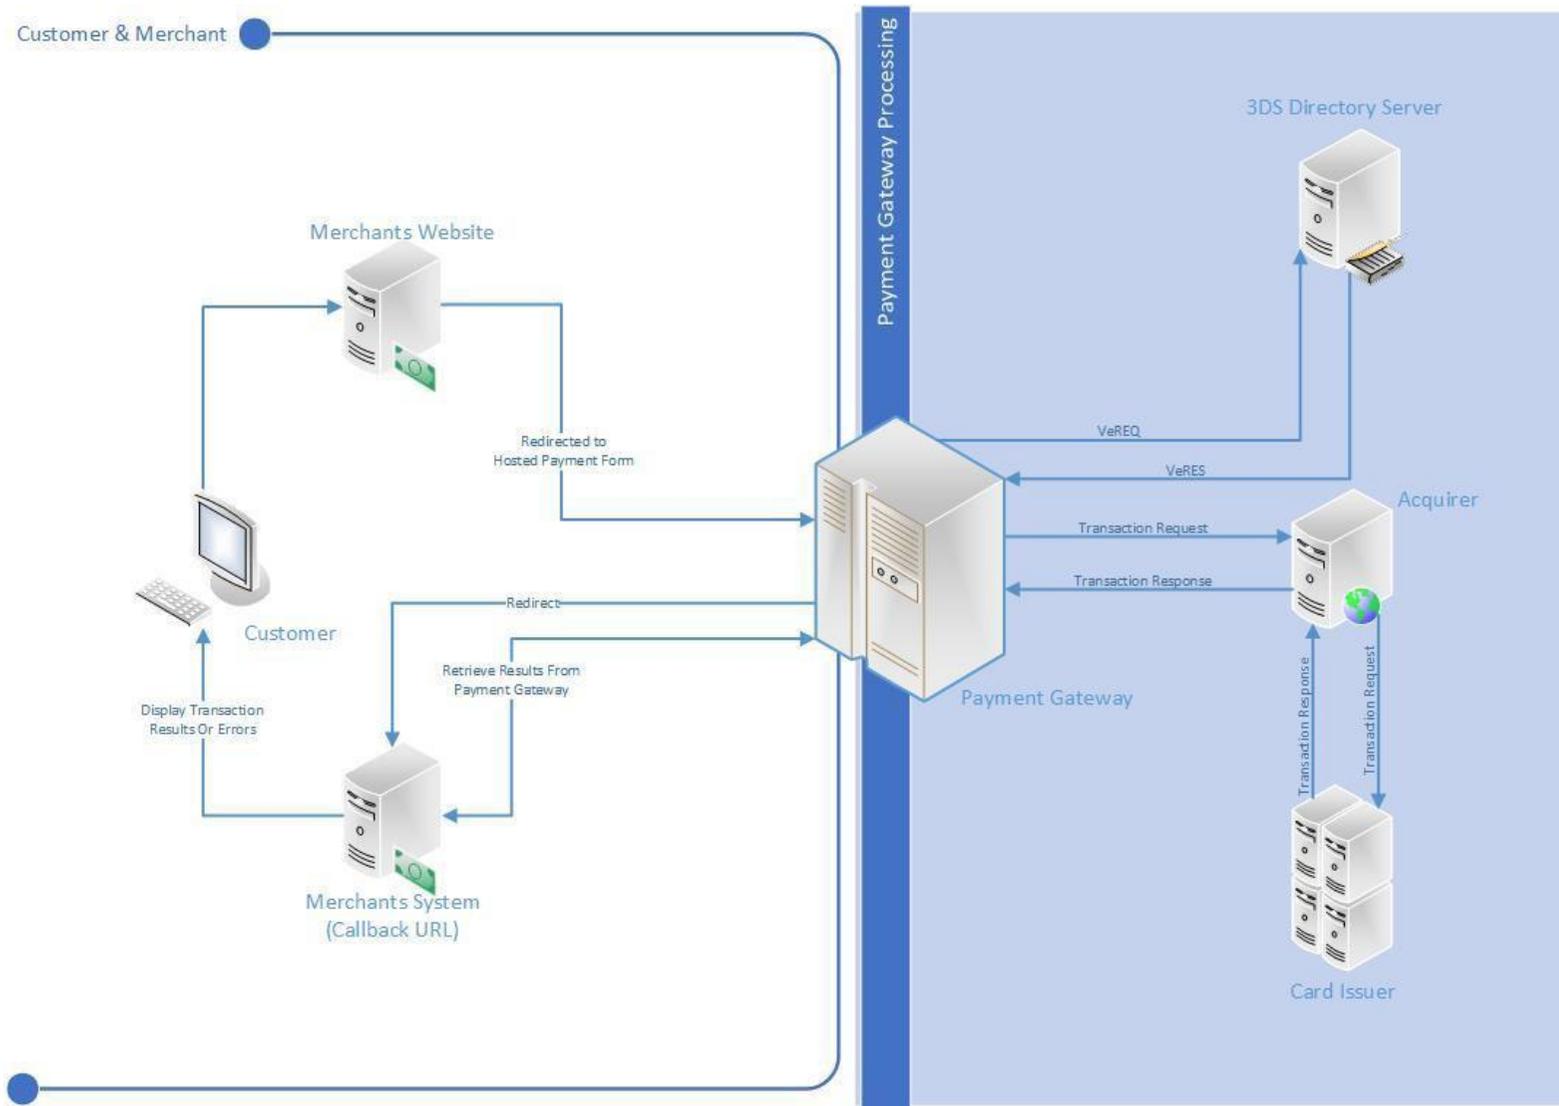

SERVER_PULL Transaction Flow – 3D Secure Disabled (MMS Settings)

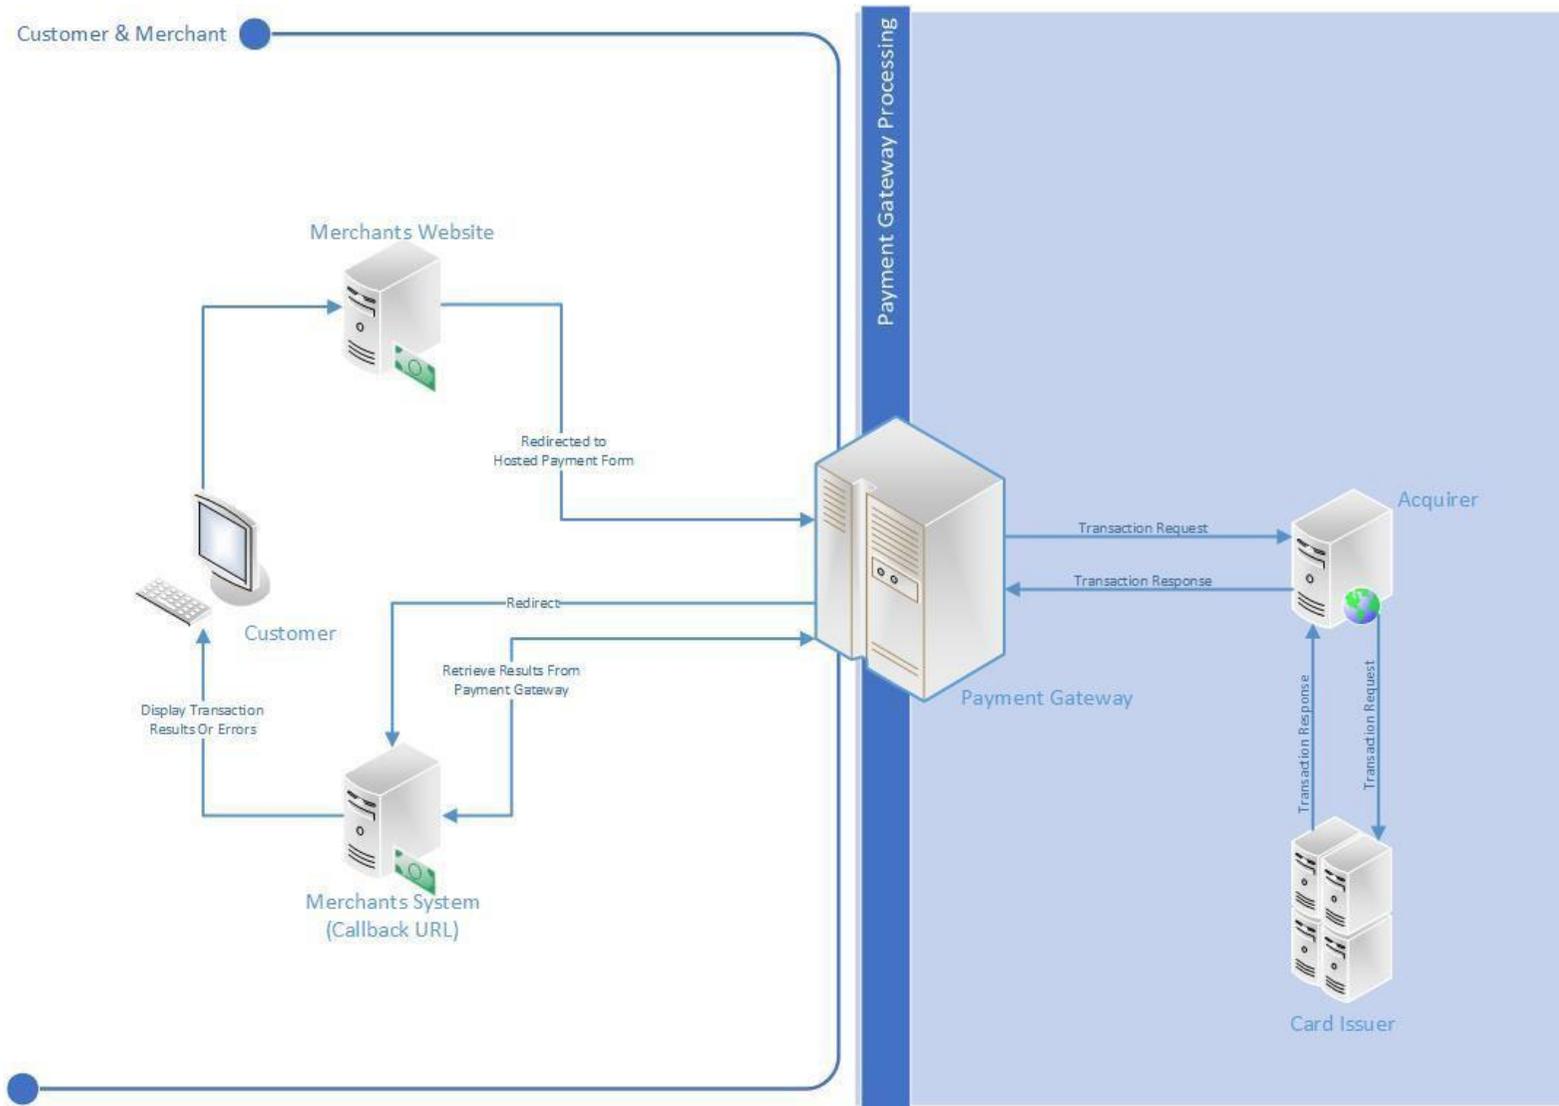

Appendix 3: Example HPF Messages

POST Result Delivery Method - Request

This is a sample SALE transaction HTML form for the POST result delivery method which is submitted to the gateway Hosted Payment Form URL.

```
<form action="https://mms.paymentprocessor.net/Pages/PublicPages/PaymentForm.aspx" method="post">

  <input type="hidden" value="000493bffd83acdc0c2d039d25c645c8ebf24777"
name="HashDigest">
  <input type="hidden" value="VALID_MERCHANT_ID_HERE" name="MerchantID">
  <input type="hidden" value="1000" name="Amount">
  <input type="hidden" value="826" name="CurrencyCode">
  <input type="hidden" value="Order-1234" name="OrderID">
  <input type="hidden" value="SALE" name="TransactionType">
  <input type="hidden" value="2013-04-26 14:45:20 +01:00"
name="TransactionDateTime">
  <input type="hidden" value="VALID_CALLBACK_URL_HERE" name="CallbackURL">
  <input type="hidden" value="A Test Order" name="OrderDescription">
  <input type="hidden" value="A Customer" name="CustomerName">
  <input type="hidden" value="14 Some Address" name="Address1">
  <input type="hidden" value="" name="Address2">
  <input type="hidden" value="" name="Address3">
  <input type="hidden" value="" name="Address4">
  <input type="hidden" value="Some City" name="City">
  <input type="hidden" value="Some State" name="State">
  <input type="hidden" value="PO57 ODE" name="PostCode">
  <input type="hidden" value="826" name="CountryCode">
  <input type="hidden" value="True" name="CV2Mandatory">
  <input type="hidden" value="False" name="Address1Mandatory">
  <input type="hidden" value="False" name="CityMandatory">
  <input type="hidden" value="False" name="PostCodeMandatory">
  <input type="hidden" value="False" name="StateMandatory">
  <input type="hidden" value="False" name="CountryMandatory">
  <input type="hidden" value="POST" name="ResultDeliveryMethod">
  <input type="hidden" value="" name="ServerResultURL">
  <input type="hidden" value="" name="PaymentFormDisplaysResult">
  <input type="hidden" value="" name="ServerResultURLCookieVariables">
  <input type="hidden" value="" name="ServerResultURLFormVariables">
  <input type="hidden" value="" name="ServerResultURLQueryStringVariables">

</form>
```

SERVER Result Delivery Method – Request

This is a sample SALE transaction HTML form for the SERVER result delivery method which is submitted to the gateway Hosted Payment Form URL.

```
<form action="https://mms.paymentprocessor.net/Pages/PublicPages/PaymentForm.aspx" method="post">

  <input type="hidden" value="bf523f370f9727ebc16a225ae7b3559ca08f7d49"
name="HashDigest">
  <input type="hidden" value="VALID_MERCHANT_ID_HERE" name="MerchantID">
  <input type="hidden" value="1000" name="Amount">
  <input type="hidden" value="826" name="CurrencyCode">
  <input type="hidden" value="Order-1234" name="OrderID">
  <input type="hidden" value="SALE" name="TransactionType">
  <input type="hidden" value="2013-04-26 16:04:12 +01:00"
name="TransactionDateTime">
  <input type="hidden" value="VALID_CALLBACK_URL_HERE" name="CallbackURL">
  <input type="hidden" value="A Test Order" name="OrderDescription">
  <input type="hidden" value="A Customer" name="CustomerName">
  <input type="hidden" value="14 Some Address" name="Address1">
  <input type="hidden" value="" name="Address2">
  <input type="hidden" value="" name="Address3">
  <input type="hidden" value="" name="Address4">
  <input type="hidden" value="Some City" name="City">
  <input type="hidden" value="Some State" name="State">
  <input type="hidden" value="PO57 ODE" name="PostCode">
  <input type="hidden" value="826" name="CountryCode">
  <input type="hidden" value="True" name="CV2Mandatory">
  <input type="hidden" value="False" name="Address1Mandatory">
  <input type="hidden" value="False" name="CityMandatory">
  <input type="hidden" value="False" name="PostCodeMandatory">
  <input type="hidden" value="False" name="StateMandatory">
  <input type="hidden" value="False" name="CountryMandatory">
  <input type="hidden" value="SERVER" name="ResultDeliveryMethod">
  <input type="hidden" value="VALID_SERVER_RESULT_URL_HERE" name="ServerResultURL">
  <input type="hidden" value="False" name="PaymentFormDisplaysResult">
  <input type="hidden" value="" name="ServerResultURLCookieVariables">
  <input type="hidden" value="" name="ServerResultURLFormVariables">
  <input type="hidden" value="" name="ServerResultURLQueryStringVariables">

</form>
```

SERVER Result Delivery Method – Reply to Gateway Response

This is an example reply the merchants system would give the gateway as part of the SERVER result delivery method. This reply would be given in response to the gateway sending the transaction result to the merchants system, and is to inform the gateway that all data was received ok or that there was an error. Depending on the language, this might be sent in the form of an “Echo” or Response.Write. Please see the integration sample pack for language specific implementation.

StatusCode=OutputStatusCode&Message=OutputMessage

SERVER_PULL Result Delivery Method – Request

```
<form action="https://mms.paymentprocessor.net/Pages/PublicPages/PaymentForm.aspx" method="post">
```

```
  <input type="hidden" value="184e4739835b7c6099f900a06d5aebf811bd8814"
name="HashDigest">
  <input type="hidden" value="VALID_MERCHANT_ID_HERE" name="MerchantID">
  <input type="hidden" value="1000" name="Amount">
  <input type="hidden" value="826" name="CurrencyCode">
  <input type="hidden" value="Order-1234" name="OrderID">
  <input type="hidden" value="SALE" name="TransactionType">
  <input type="hidden" value="2013-04-26 16:04:12 +01:00"
name="TransactionDateTime">
  <input type="hidden" value="VALID_CALLBACK_URL_HERE" name="CallbackURL">
  <input type="hidden" value="A Test Order" name="OrderDescription">
  <input type="hidden" value="A Customer" name="CustomerName">
  <input type="hidden" value="14 Some Address" name="Address1">
  <input type="hidden" value="" name="Address2">
  <input type="hidden" value="" name="Address3">
  <input type="hidden" value="" name="Address4">
  <input type="hidden" value="Some City" name="City">
  <input type="hidden" value="Some State" name="State">
  <input type="hidden" value="PO57 ODE" name="PostCode">
  <input type="hidden" value="826" name="CountryCode">
  <input type="hidden" value="True" name="CV2Mandatory">
  <input type="hidden" value="False" name="Address1Mandatory">
  <input type="hidden" value="False" name="CityMandatory">
  <input type="hidden" value="False" name="PostCodeMandatory">
  <input type="hidden" value="False" name="StateMandatory">
  <input type="hidden" value="False" name="CountryMandatory">
  <input type="hidden" value="SERVER_PULL" name="ResultDeliveryMethod">
  <input type="hidden" value="" name="ServerResultURL">
  <input type="hidden" value="" name="PaymentFormDisplaysResult">
  <input type="hidden" value="" name="ServerResultURLCookieVariables">
  <input type="hidden" value="" name="ServerResultURLFormVariables">
  <input type="hidden" value="" name="ServerResultURLQueryStringVariables">
```

```
</form>
```

Hosted Payment Form – Response

This is an example transaction result response from the gateway. Depending on the chosen result delivery method, this may be returned as a name-value pair (such as the query string) but for the sake of clarity, the example is in HTML Form mark-up.

```
<form action="https://mms.paymentprocessor.net/Pages/PublicPages/PaymentForm.aspx" method="post">

  <input type="hidden" value="a322c03df4ac48608fb006e5b4779de91d81e881"
name="HashDigest">
  <input type="hidden" value="0" name="StatusCode">
  <input type="hidden" value="AuthCode%3a+222216" name="Message">
  <input type="hidden" value="" name="PreviousStatusCode">
  <input type="hidden" value="" name="PreviousMessage">
  <input type="hidden" value="130426143631843702133322" name="CrossReference">
  <input type="hidden" value="1000" name="Amount">
  <input type="hidden" value="826" name="CurrencyCode">
  <input type="hidden" value="Order-1234" name="OrderID">
  <input type="hidden" value="SALE" name="TransactionType">
  <input type="hidden" value="2013-04-26 14:45:20 +01:00"
name="TransactionDateTime">
  <input type="hidden" value="A Test Order" name="OrderDescription">
  <input type="hidden" value="A Customer" name="CustomerName">
  <input type="hidden" value="14 Some Address" name="Address1">
  <input type="hidden" value="" name="Address2">
  <input type="hidden" value="" name="Address3">
  <input type="hidden" value="" name="Address4">
  <input type="hidden" value="Some City" name="City">
  <input type="hidden" value="Some State" name="State">
  <input type="hidden" value="PO57 0DE" name="PostCode">
  <input type="hidden" value="826" name="CountryCode">

</form>
```

Appendix 4: Transaction Result Status Codes

The StatusCode is a numerical value representation for the result of the transaction. If any other code is returned not listed here, it should be treated as an error and handled accordingly.

StatusCode	Explanation
0	Transaction Successful
3	Issuer Authentication Required. This means the card is enrolled for 3D Secure Authentication and is required before the transaction can continue.
5	Transaction Declined. You may sometimes get additional information in the Transaction Result Message as to why if we are informed as to why.
20	Duplication Transaction.
30	An Error Occurred.

Appendix 5: Override Policy Codes & Explanations

OverrideAVSPolicy Codes

The OverrideAVSPolicy codes are 4 character codes which instruct the gateway how to handle the AVS checking for that particular transaction.

The first character determines the behaviour when 1 or more of the results of the address numeric or post code check are known.

The second and third characters determine the behaviour when dealing with partial matches – this is where either the address numeric check or the post code check returns partial matches.

The fourth character determines the behaviour when none of the results of the address numeric or the post code check are known.

Character 1 Codes

Character Code	Explanation
E	This code means fail the transaction if either the address numeric check or post code check has failed
B	This code means fail the transaction only if both the address numeric check and the post code checks have failed
A	This code means fail the transaction only if the address numeric check has failed
P	This code means fail the transaction only if the post code check has failed
N	This code means pass the transaction even if both checks have failed

Character 2 Codes

Character Code	Explanation
P	Treat partial address numeric results as passes
F	Treat partial address numeric results as failures

Character 3 Codes

Character Code	Explanation
P	Treat partial post code results as passes
F	Treat partial post code results as failures

Character 4 Codes

Character Code	Explanation
P	This code means pass the transaction if both results of the AVS check are not known
F	This code means fail the transaction if both results of the AVS check are not known

Examples

EEEE – this is the strongest policy & transactions will only pass if both address numeric & post code checks have passed. Partial matches are treated as failures

EPFP – this policy means that transactions will only pass if both the address numeric & post code checks have passed, but if the results of both are unknown, then pass the transaction. Partial address numeric results are treated as passes, but partial post code checks are treated as failures

BPPF – this policy means that the transaction will fail only if both the address numeric and post code checks have failed, but if the results of both are unknown, then fail the transaction. Both address numeric and post code partial results are treated as passes

NPPF – this policy means that the transaction will pass even if the results of the address numeric and post code checks are failed, but if the results are unknown, then fail the transaction (not a recommended policy!) . Both address numeric and post code partial results are treated as passes

NPPP – this is the weakest policy & transactions will pass regardless of the results of the address numeric & post code checks. Both address numeric and post code partial results are treated as passes.

Questions

Q: Why would the results of the AVS check be unknown?

A: The main reasons for the results of the AVS checks being unknown are:

- 1) The relevant address data was not passed in with the transaction – the address numeric check is carried out across the Address1, Address2, Address3, Address4, City & State fields – if none of them are present, then the state of the address numeric check will be unknown. Similarly, the post code check is carried out of the field PostCode & if that is not present, then the state of the post code check will be unknown.
- 2) If the transaction is a cross reference transaction & the respective address information was not submitted with the transaction, or was not submitted or unknown for the transaction being referenced, then the result will carry forward to this transaction
- 3) If there was a problem contacting the provider, or the provider itself had a problem delivering the results of the AVS checks (least likely reason)

OverrideCV2Policy Codes

The OverrideCV2Policy codes are 2 character codes which instruct the gateway how to handle the CV2 checking for that particular transaction.

The first character determines the behaviour when 1 or more of the results of the address numeric or post code check are known.

The second character determines the behaviour when none of the results of the address numeric or the post code check are known.

Character 1 Codes

Character Code	Explanation
P	This code means pass the transaction if the CV2 check has failed
F	This code means fail the transaction if the CV2 check has failed

Character 2 Codes

Character Code	Explanation
P	This code means pass the transaction if both results of the CV2 check are not known
F	This code means fail the transaction if both results of the CV2 check are not known

Examples

FF – this is the strongest policy & transactions will only pass if the CV2 check has passed

FP – this policy means that transactions will only pass if the CV2 has passed, but if the results are unknown, then pass the transaction

PF – this policy means that the transaction will pass if the CV2 failed, but if the result of the check is unknown, then fail the transaction (not a recommended policy!)

PP – this is the weakest policy & transactions will pass regardless of the results of the CV2 check

Questions

Q: Why would the CV2 result be unknown?

A: The main reasons for the result being unknown are:

- 1) The CV2 was not submitted with the transaction
- 2) If the transaction is a cross reference transaction & the CV2 code was not submitted as an override, or was not submitted or unknown for the original transaction being referenced, then that result will carry forward to this transaction
- 3) If there was a problem contacting the provider, or the provider itself had a problem delivering the results of the CV2 check (least likely reason)

Appendix 6: Country (ISO 3166-1) Codes

ISO Code	Country
826	United Kingdom
840	United States
036	Australia
004	Afghanistan
248	Åland Islands
008	Albania
012	Algeria
016	American Samoa
020	Andorra
024	Angola
660	Anguilla
010	Antarctica
028	Antigua and Barbuda
032	Argentina
051	Armenia
533	Aruba
040	Austria
031	Azerbaijan
044	Bahamas
048	Bahrain
050	Bangladesh
052	Barbados
112	Belarus
056	Belgium
084	Belize
204	Benin
060	Bermuda
064	Bhutan
068	Bolivia
070	Bosnia and Herzegovina
072	Botswana
074	Bouvet Island
076	Brazil
086	British Indian Ocean Territory
096	Brunei Darussalam
100	Bulgaria
854	Burkina Faso
108	Burundi
116	Cambodia
120	Cameroon

124	Canada
132	Cape Verde
136	Cayman Islands
140	Central African Republic
148	Chad
152	Chile
156	China
162	Christmas Island
166	Cocos (Keeling) Islands
170	Colombia
174	Comoros
178	Congo
180	Congo, Democratic Republic of the
184	Cook Islands
188	Costa Rica
384	Côte d'Ivoire
191	Croatia
192	Cuba
196	Cyprus
203	Czech Republic
208	Denmark
262	Djibouti
212	Dominica
214	Dominican Republic
218	Ecuador
818	Egypt
222	El Salvador
226	Equatorial Guinea
232	Eritrea
233	Estonia
231	Ethiopia
238	Falkland Islands (Malvinas)
234	Faroe Islands
242	Fiji
246	Finland
250	France
254	French Guiana
258	French Polynesia
260	French Southern Territories
266	Gabon
270	Gambia
268	Georgia
276	Germany
288	Ghana

292	Gibraltar
300	Greece
304	Greenland
308	Grenada
312	Guadeloupe
316	Guam
320	Guatemala
831	Guernsey
324	Guinea
624	Guinea-Bissau
328	Guyana
332	Haiti
334	Heard Island and McDonald Islands
336	Holy See (Vatican City State)
340	Honduras
344	Hong Kong
348	Hungary
352	Iceland
356	India
360	Indonesia
364	Iran, Islamic Republic of
368	Iraq
372	Ireland
833	Isle of Man
376	Israel
380	Italy
388	Jamaica
392	Japan
832	Jersey
400	Jordan
398	Kazakhstan
404	Kenya
296	Kiribati
408	Korea, Democratic People's Republic of
410	Korea, Republic of
414	Kuwait
417	Kyrgyzstan
418	Lao People's Democratic Republic
428	Latvia
422	Lebanon
426	Lesotho
430	Liberia
434	Libyan Arab Jamahiriya
438	Liechtenstein

440	Lithuania
442	Luxembourg
446	Macao
807	Macedonia, the former Yugoslav Republic of
450	Madagascar
454	Malawi
458	Malaysia
462	Maldives
466	Mali
470	Malta
584	Marshall Islands
474	Martinique
478	Mauritania
480	Mauritius
175	Mayotte
484	Mexico
583	Micronesia, Federated States of
498	Moldova
492	Monaco
496	Mongolia
499	Montenegro
500	Montserrat
504	Morocco
508	Mozambique
104	Myanmar
516	Namibia
520	Nauru
524	Nepal
528	Netherlands
530	Netherlands Antilles
540	New Caledonia
554	New Zealand
558	Nicaragua
562	Niger
566	Nigeria
570	Niue
574	Norfolk Island
580	Northern Mariana Islands
578	Norway
512	Oman
586	Pakistan
585	Palau
275	Palestinian Territory, Occupied
591	Panama

598	Papua New Guinea
600	Paraguay
604	Peru
608	Philippines
612	Pitcairn
616	Poland
620	Portugal
630	Puerto Rico
634	Qatar
638	Reunion Réunion
642	Romania
643	Russian Federation
646	Rwanda
652	Saint Barthélemy
654	Saint Helena
659	Saint Kitts and Nevis
662	Saint Lucia
663	Saint Martin (French part)
666	Saint Pierre and Miquelon
670	Saint Vincent and the Grenadines
882	Samoa
674	San Marino
678	Sao Tome and Principe
682	Saudi Arabia
686	Senegal
688	Serbia
690	Seychelles
694	Sierra Leone
702	Singapore
703	Slovakia
705	Slovenia
90	Solomon Islands
706	Somalia
710	South Africa
239	South Georgia and the South Sandwich Islands
724	Spain
144	Sri Lanka
736	Sudan
740	Suriname
744	Svalbard and Jan Mayen
748	Swaziland
752	Sweden
756	Switzerland
760	Syrian Arab Republic

158	Taiwan, Province of China
762	Tajikistan
834	Tanzania, United Republic of
764	Thailand
626	Timor-Leste
768	Togo
772	Tokelau
776	Tonga
780	Trinidad and Tobago
788	Tunisia
792	Turkey
795	Turkmenistan
796	Turks and Caicos Islands
798	Tuvalu
800	Uganda
804	Ukraine
784	United Arab Emirates
581	United States Minor Outlying Islands
858	Uruguay
860	Uzbekistan
548	Vanuatu
862	Venezuela
704	Viet Nam
92	Virgin Islands, British
850	Virgin Islands, U.S.
876	Wallis and Futuna
732	Western Sahara
887	Yemen
894	Zambia
716	Zimbabwe

Appendix 7: Currency (ISO 4217) Codes

ISO Code	Currency
826	Pound Sterling
840	US Dollar
978	Euro
971	Afghani
12	Algerian Dinar
32	Argentine Peso
51	Armenian Dram
533	Aruban Guilder
36	Australian Dollar
944	Azerbaijani Manat
44	Bahamian Dollar
48	Bahraini Dinar
764	Baht
590	Balboa
50	Bangladeshi Taka
52	Barbados Dollar
974	Belarusian Ruble
84	Belize Dollar
60	Bermudian Dollar
984	Bolivian Mvdol (Funds code)
68	Boliviano
986	Brazilian Real
96	Brunei Dollar
975	Bulgarian Lev
108	Burundian Franc
124	Canadian Dollar
132	Cape Verde Escudo
136	Cayman Islands Dollar
288	Cedi
952	CFA Franc BCEAO
950	CFA Franc BEAC
953	CFP franc
152	Chilean Peso
963	Code reserved for testing purposes
170	Colombian Peso
174	Comoro Franc
977	Convertible Marks
558	Cordoba Oro
188	Costa Rican Colon
191	Croatian Kuna
192	Cuban Peso

196	Cyprus Pound
203	Czech Koruna
270	Dalasi
208	Danish Krone
807	Denar
262	Djibouti Franc
678	Dobra
214	Dominican Peso
951	East Caribbean Dollar
818	Egyptian Pound
230	Ethiopian Birr
955	European Composite Unit (EURCO)
956	European Monetary Unit
958	European Unit of Account 17 (E.U.A.-17)
957	European Unit of Account 9 (E.U.A.-9)
238	Falkland Islands Pound
242	Fiji Dollar
348	Forint
976	Franc Congolais
292	Gibraltar pound
959	Gold (one Troy ounce)
600	Guarani
324	Guinea Franc
328	Guyana Dollar
332	Haiti Gourde
344	Hong Kong Dollar
980	Hryvnia
352	Iceland Krona
356	Indian Rupee
364	Iranian Rial
368	Iraqi Dinar
388	Jamaican Dollar
392	Japanese yen
400	Jordanian Dinar
404	Kenyan Shilling
598	Kina
418	Kip
233	Kroon
414	Kuwaiti Dinar
894	Kwacha
454	Kwacha
973	Kwanza
104	Kyat
981	Lari

428	Latvian Lats
422	Lebanese Pound
8	Lek
340	Lempira
694	Leone
430	Liberian Dollar
434	Libyan Dinar
748	Lilangeni
440	Lithuanian Litas
426	Loti
969	Malagasy Ariary
458	Malaysian Ringgit
470	Maltese Lira
795	Manat
480	Mauritius Rupee
943	Metical
484	Mexican Peso
979	Mexican Unidad de Inversion (UDI)
498	Moldovan Leu
504	Moroccan Dirham
566	Naira
232	Nakfa
516	Namibian Dollar
524	Nepalese Rupee
532	Netherlands Antillian Guilder
376	New Israeli Shekel
901	New Taiwan Dollar
949	New Turkish Lira
554	New Zealand Dollar
64	Ngultrum
999	No currency
408	North Korean Won
578	Norwegian Krone
604	Nuevo Sol
478	Ouguiya
776	Pa'anga
586	Pakistan Rupee
964	Palladium (one Troy ounce)
446	Pataca
858	Peso Uruguayo
608	Philippine Peso
962	Platinum (one Troy ounce)
72	Pula
634	Qatari Rial

320	Quetzal
512	Rial Omani
116	Riel
642	Romanian Leu
946	Romanian New Leu
462	Rufiyaa
360	Rupiah
643	Russian Ruble
646	Rwanda Franc
654	Saint Helena Pound
882	Samoan Tala
682	Saudi Riyal
941	Serbian Dinar
690	Seychelles Rupee
961	Silver (one Troy ounce)
702	Singapore Dollar
703	Slovak Koruna
90	Solomon Islands Dollar
417	Som
706	Somali Shilling
972	Somoni
710	South African Rand
410	South Korean Won
960	Special Drawing Rights
144	Sri Lanka Rupee
938	Sudanese Pound
968	Surinam Dollar
752	Swedish Krona
756	Swiss Franc
760	Syrian Pound
834	Tanzanian Shilling
398	Tenge
780	Trinidad and Tobago Dollar
496	Tugrik
788	Tunisian Dinar
800	Uganda Shilling
970	Unidad de Valor Real
990	Unidades de formento
784	United Arab Emirates dirham
860	Uzbekistan Som
548	Vatu
862	Venezuelan bolívar
704	Vietnamese đồng
947	WIR Euro

948	WIR Franc
886	Yemeni Rial
156	Yuan Renminbi
716	Zimbabwe Dollar
985	Zloty
997	No currency
998	No currency